




EUROPEAN
SPALLATION
SOURCE

ESS AND NEUTRINOS, AN EXCITING TIME AHEAD


Mamad Eshraqi for ESSnuSB

Beam physics section leader / Accelerator Division / ESS
ESSnuSB Linac upgrade WP leader



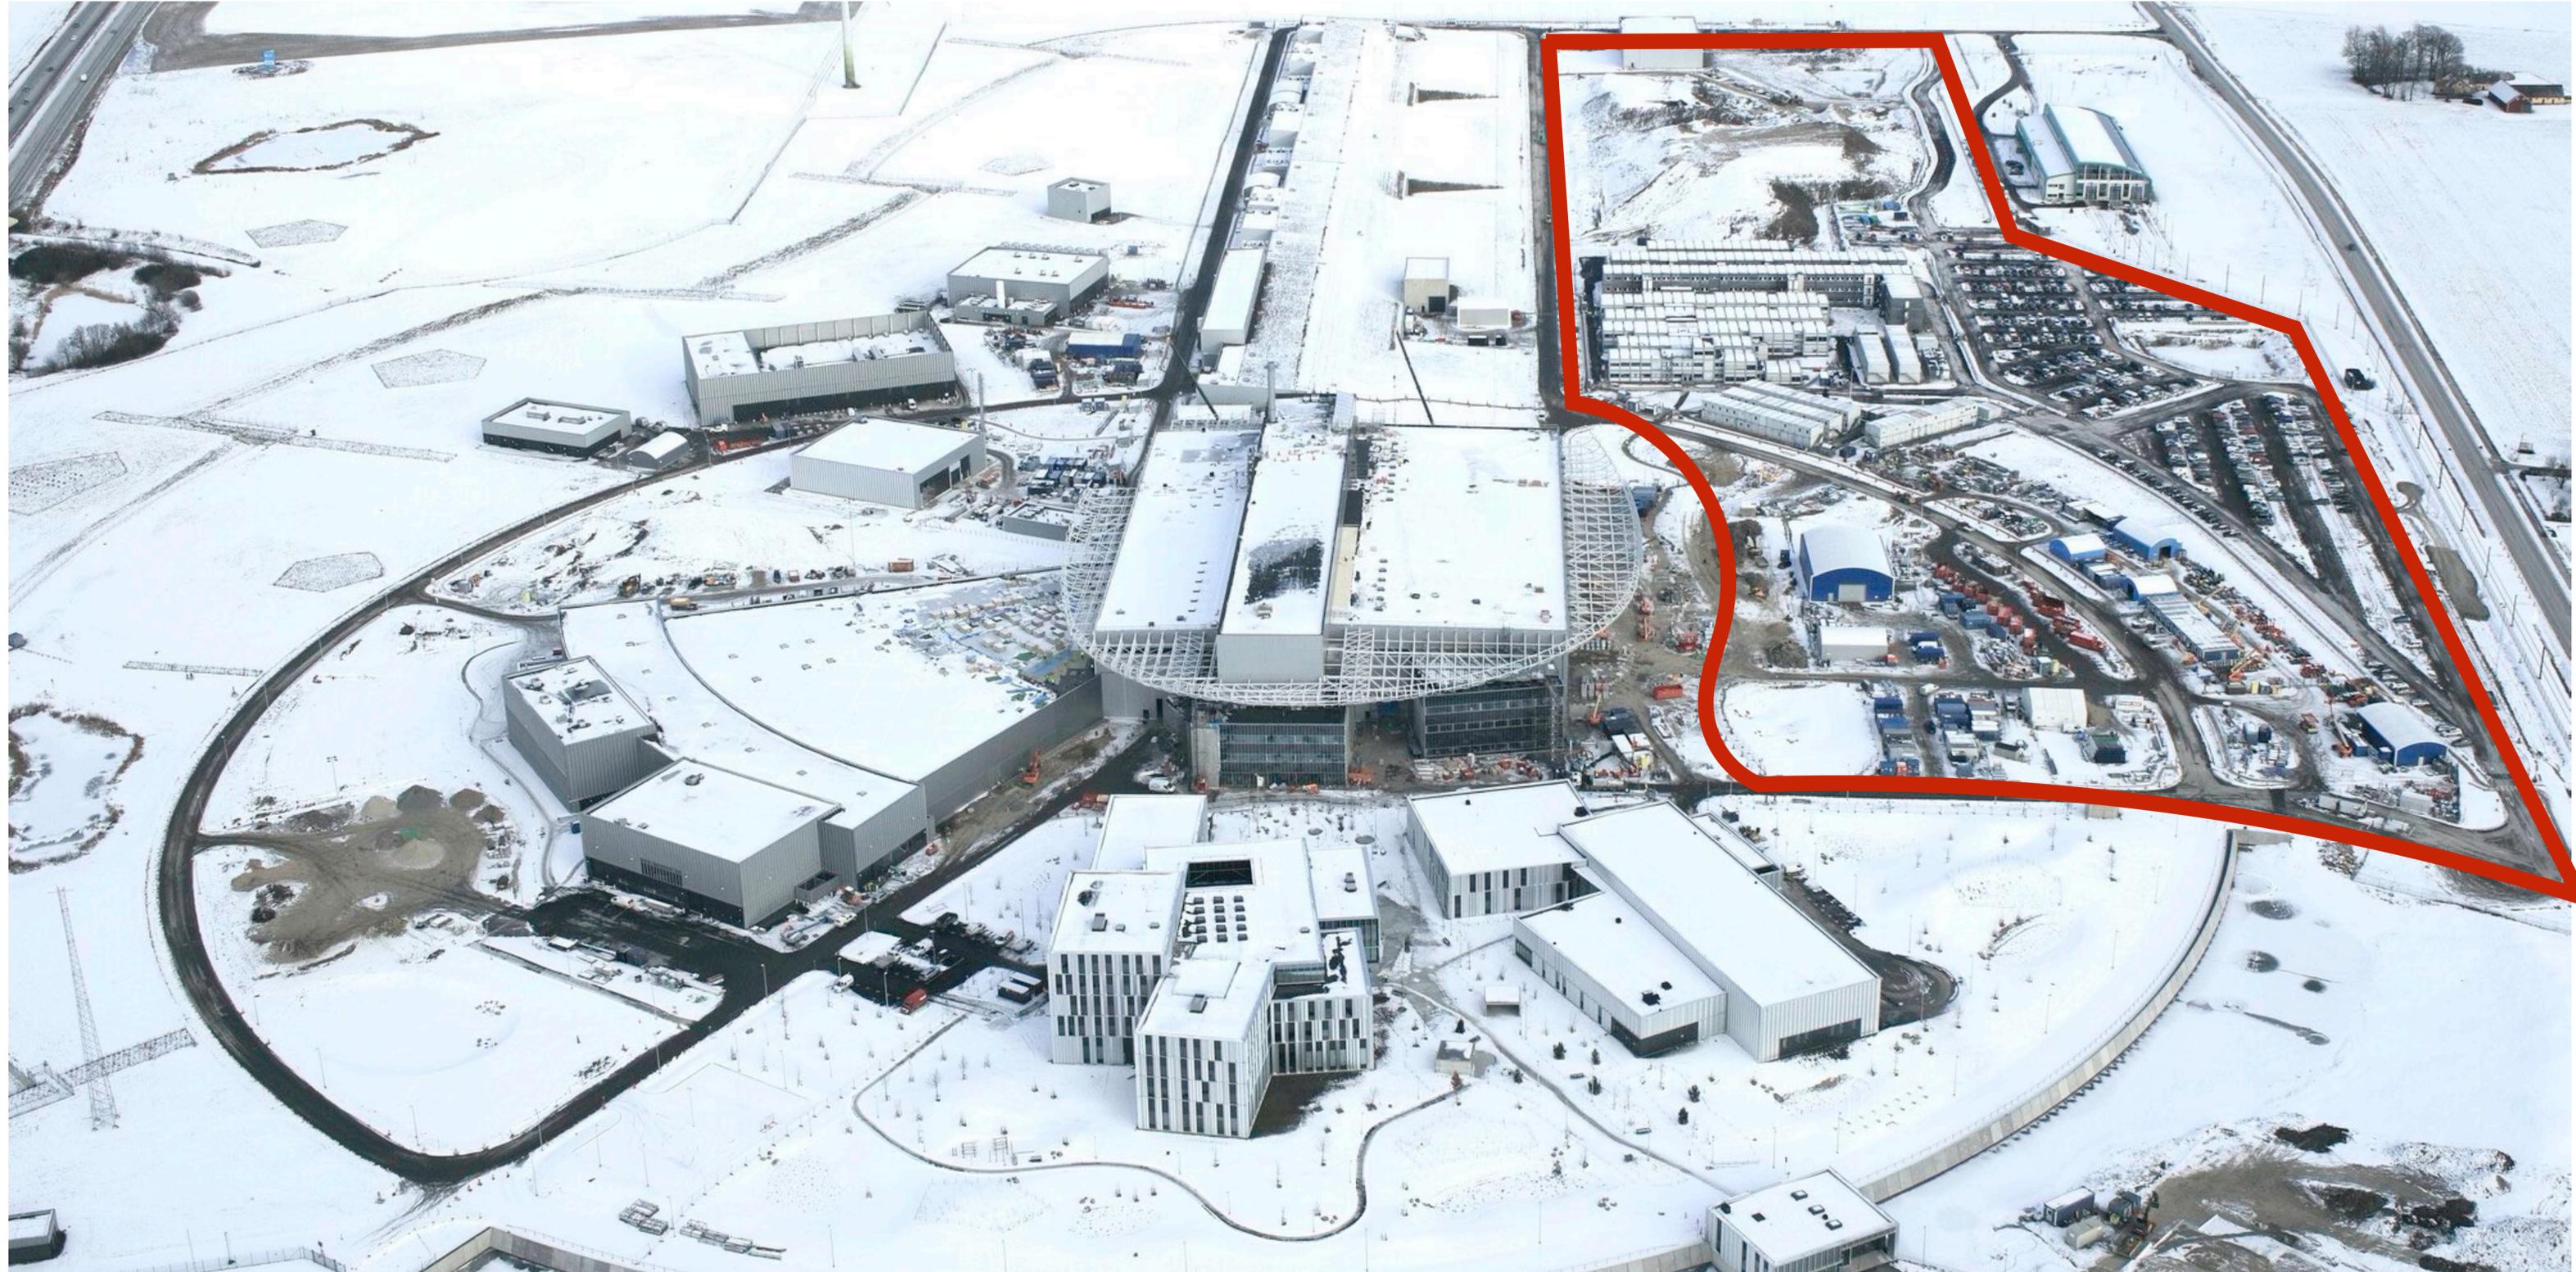

FINANCING: CASH AND IN-KIND

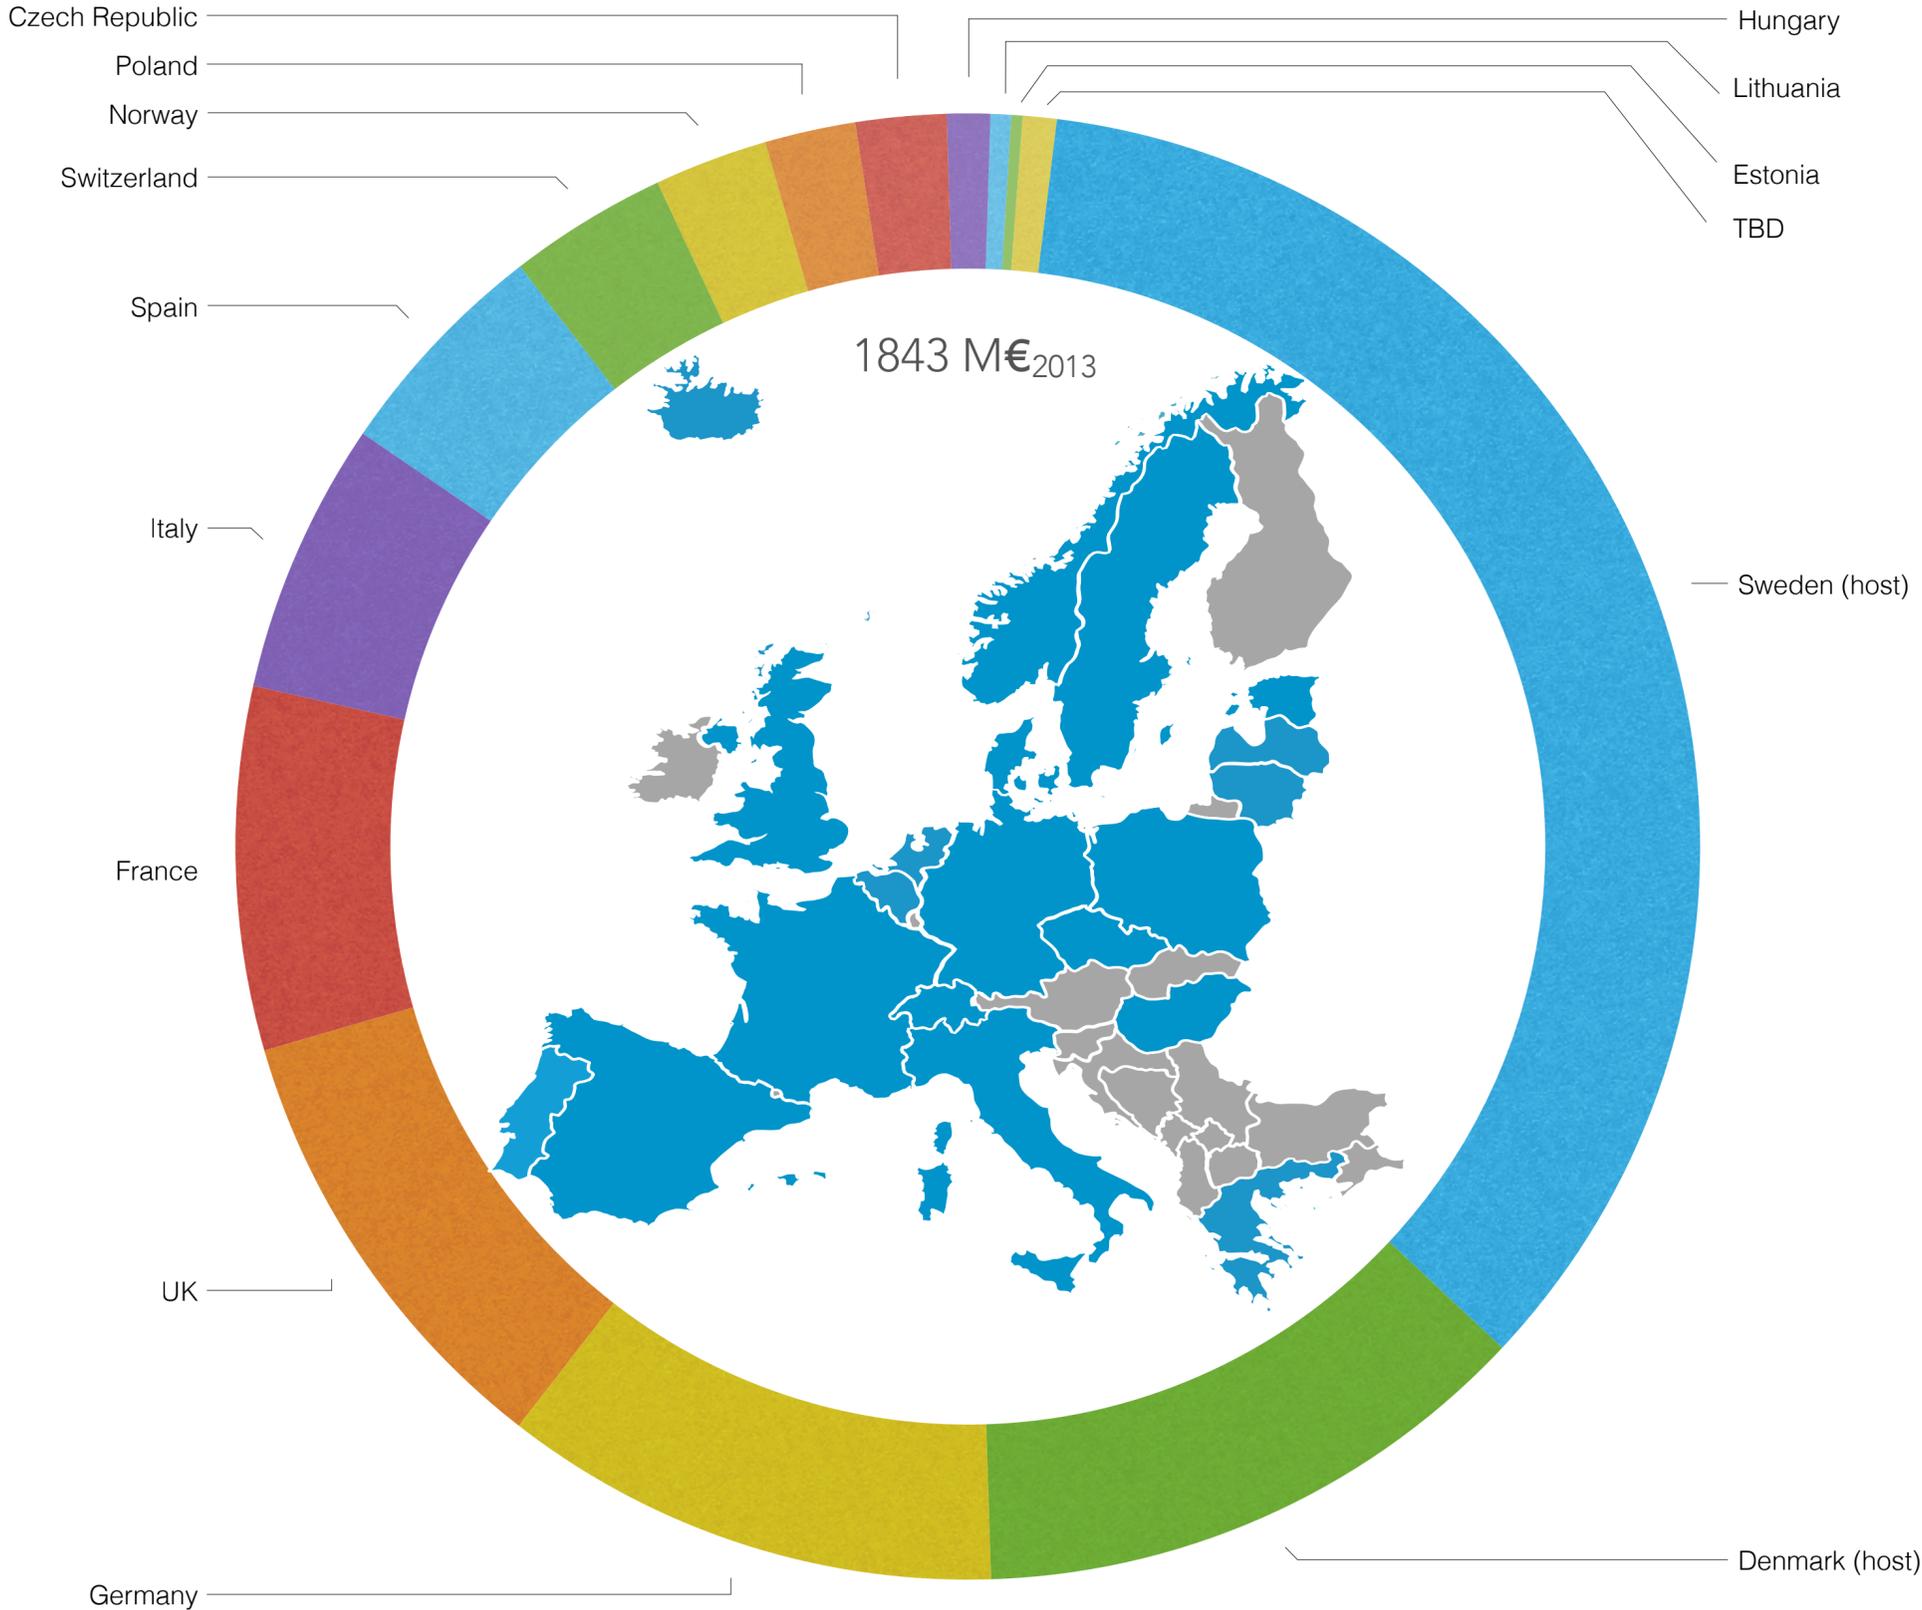

INTERNATIONAL COLLABORATION




- Aarhus University
- Atomki-Institute for Nuclear Research
- Agder University
- Bergen University
- CEA Saclay, Paris
- Centre for Energy Research, Budapest
- Centre for Nuclear Research, Poland, (NCBJ)
- CERN, Geneva
- CNR, Rome
- CNRS Orsay, Paris
- Cockcroft Institute, Daresbury
- DESY, Hamburg
- Delft University of Technology
- Edinburgh University
- Elettra-SincrotroneTrieste
- ESSBilbao
- Forschungszentrum Jülich
- Helmholtz-Zentrum Geesthacht
- Huddersfield University
- IFJ PAN, Krakow
- INFN, Catania
- INFN, Legnaro
- INFN, Milan
- Institute for Energy Research (IFE)
- Institut Laue-Langevin (ILL)
- Rutherford-Appleton Laboratory, Oxford (ISIS)
- Copenhagen University
- Laboratoire Léon Brillouin (LLB)
- Lodz University of Technology
- Lund University
- Nuclear Physics Institute of the ASCR
- Oslo University
- Paul Sherrer Institute
- Roskilde University
- Tallinn Technical University
- Technical University of Chemnitz
- Technical University of Denmark
- Technical University Munich
- Science and Technology Facilities Council (STFC)
- University of Tartu
- Uppsala University
- WIGNER Research Centre for Physics
- Wrocław University of technology
- Warsaw University of Technology
- Zurich University of Applied Sciences (ZHAW)







MAX IV; OUR BRIGHT NEIGHBOR!



- A fourth generation light source
 - Brightest light source
 - A full energy linac of 3 GeV
 - Two storage rings
 - 3 GeV; 528 m, and
 - 1.5 GeV 96 m (ex-Max-III)
 - Beam lines (20 + 12)

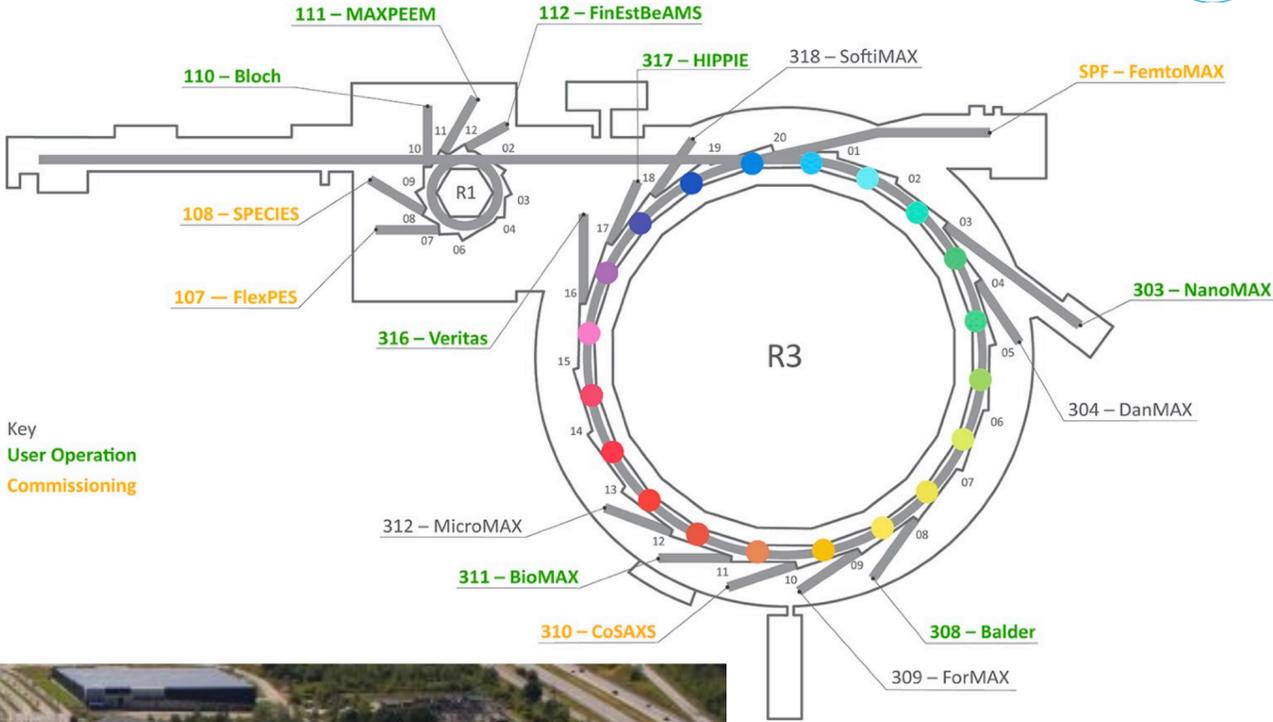



PHOTONS VS. NEUTRONS

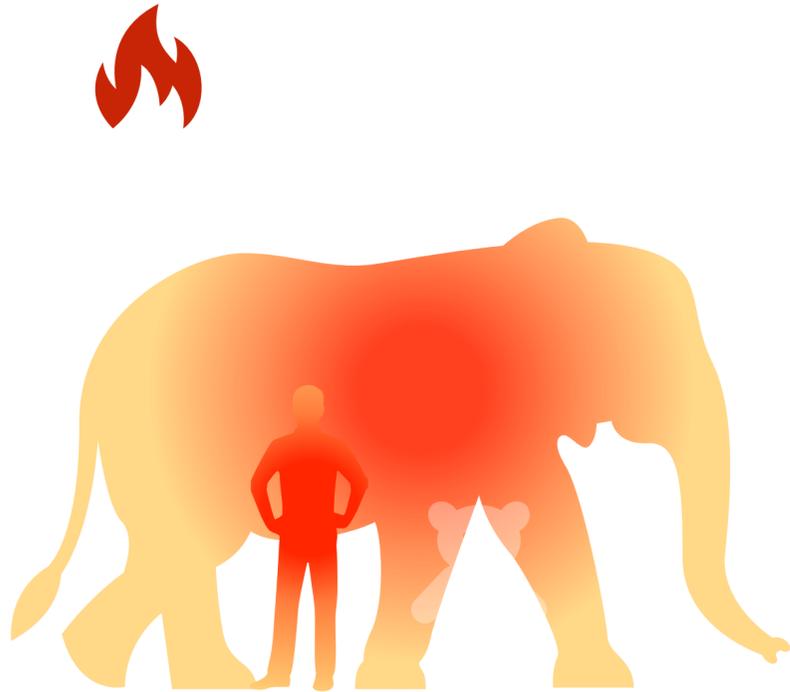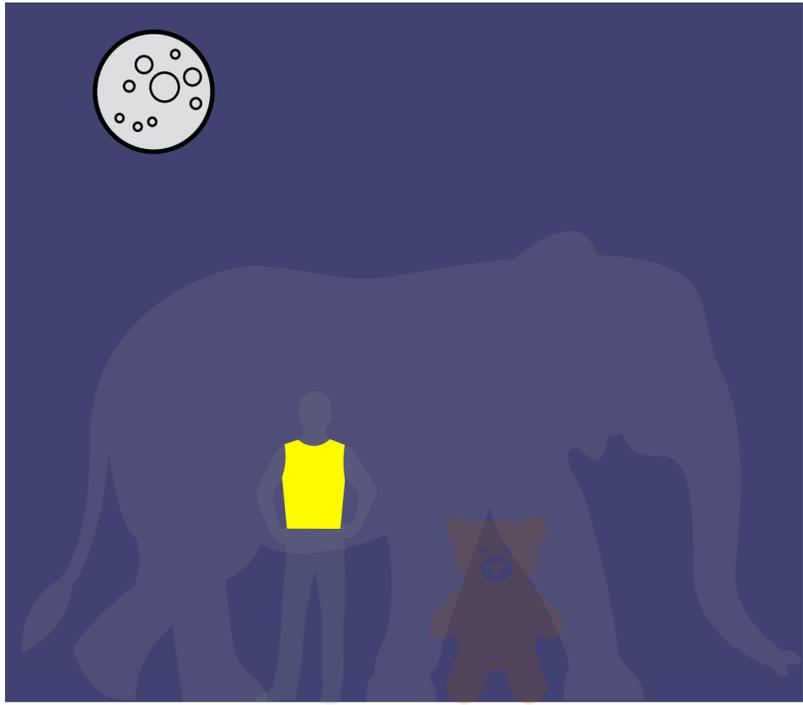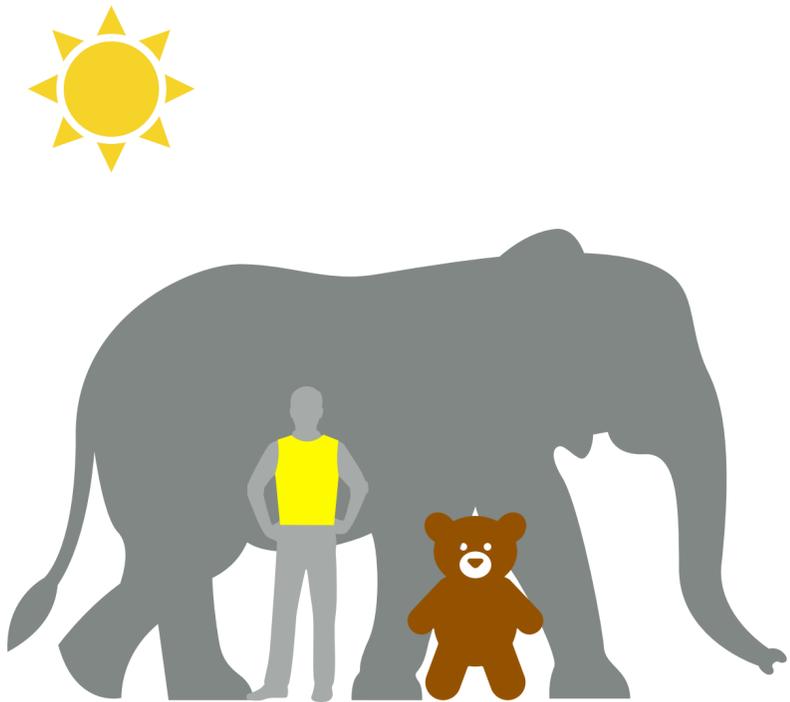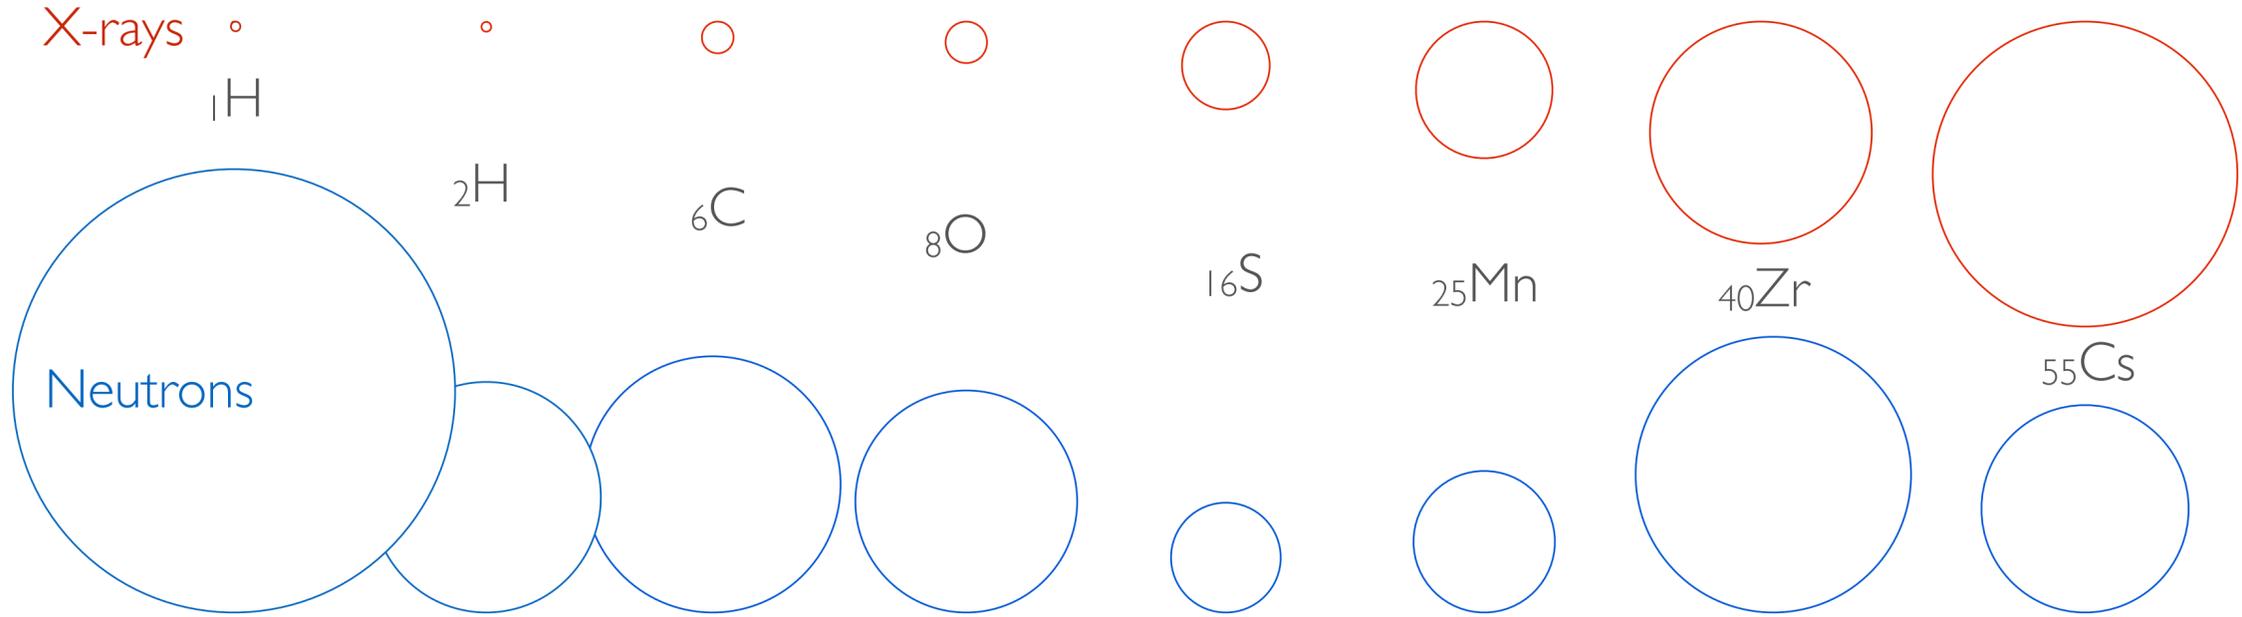



PHOTONS VS. NEUTRONS




X-rays

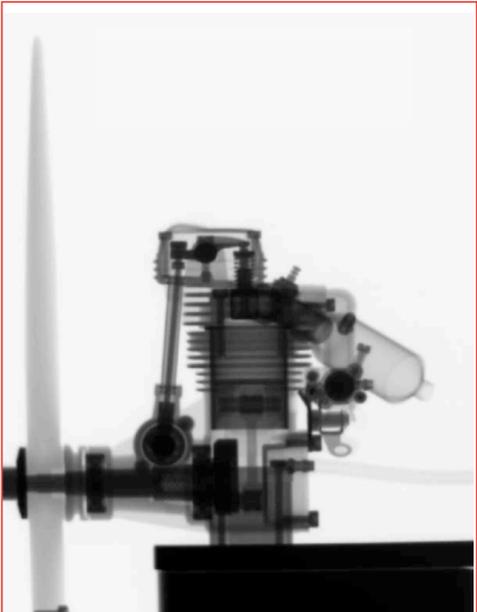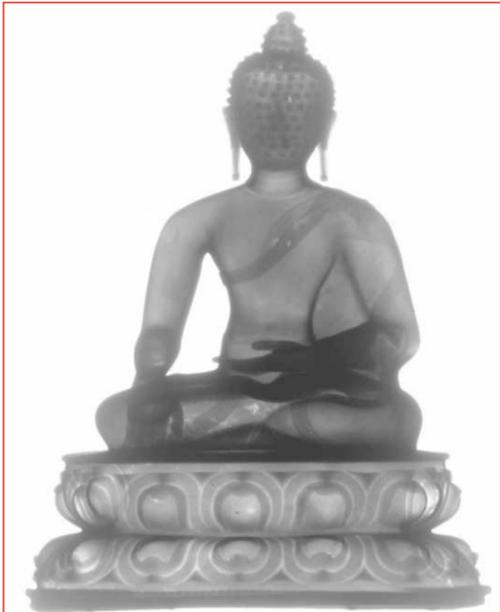


Neutrons

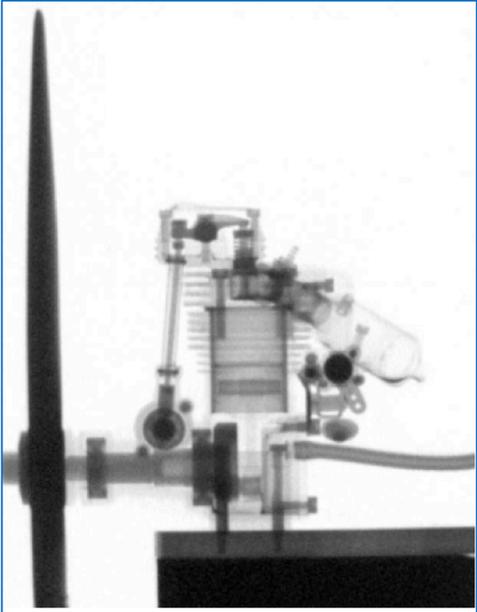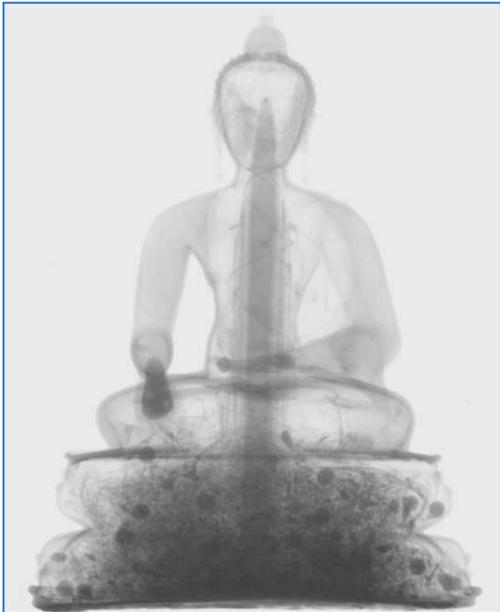

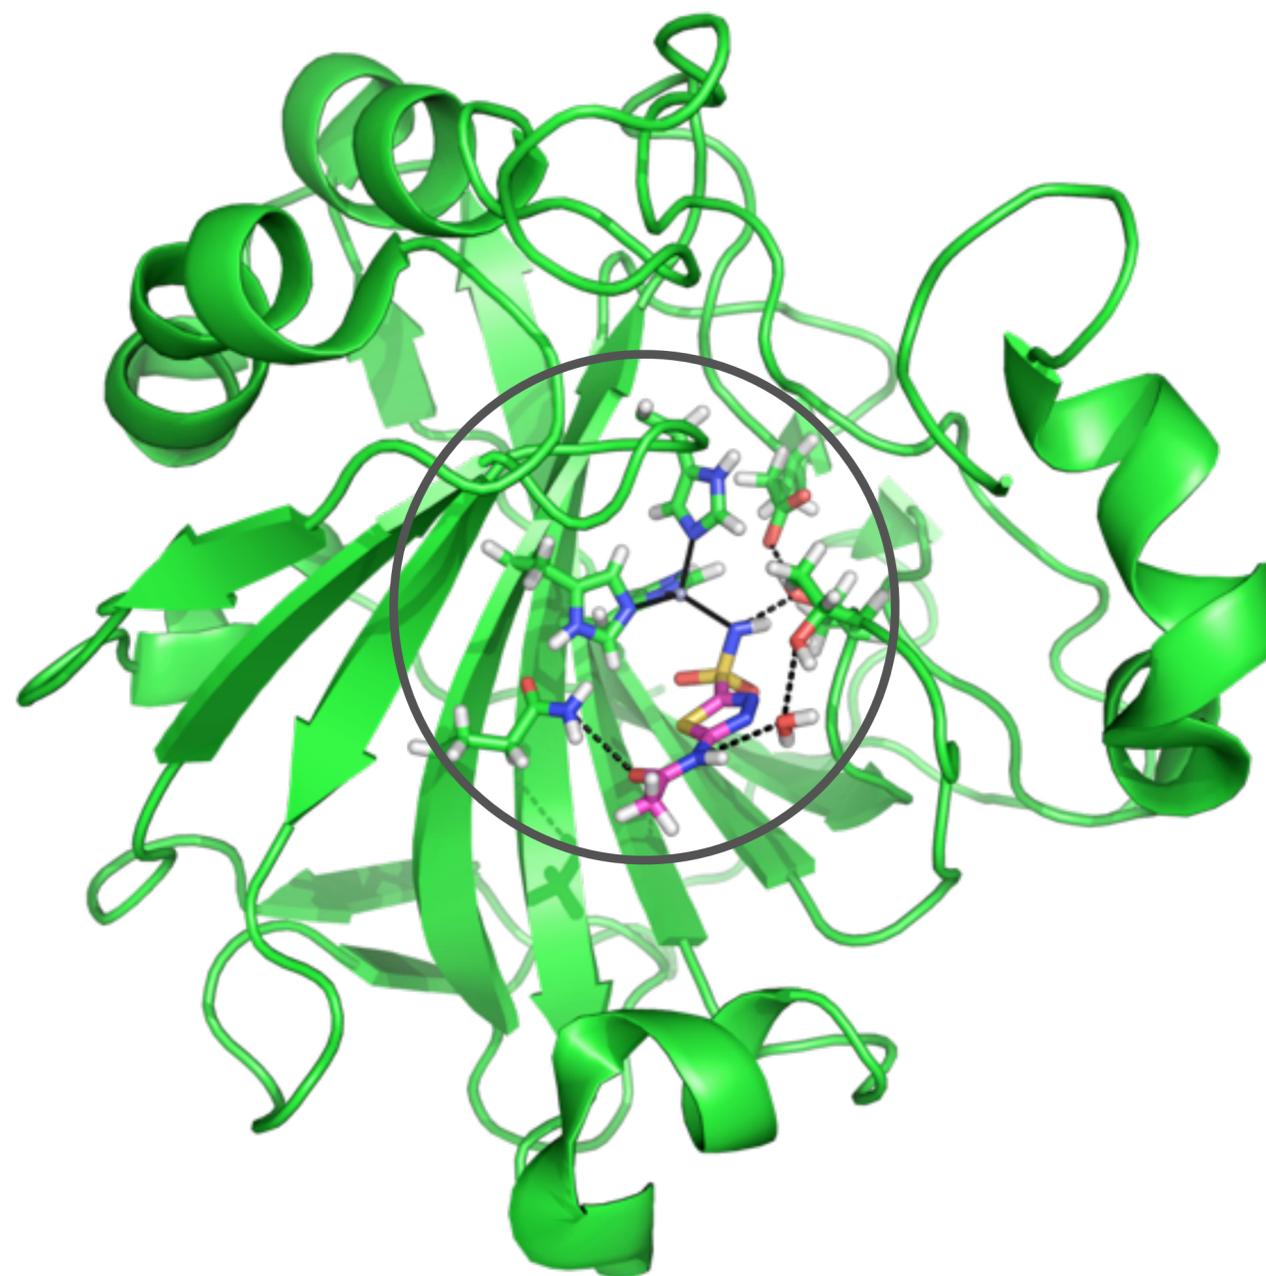

- This enzyme transports CO₂ and regulates blood pH.
- It is a major player in some cancers, glaucoma, obesity and high blood pressure.

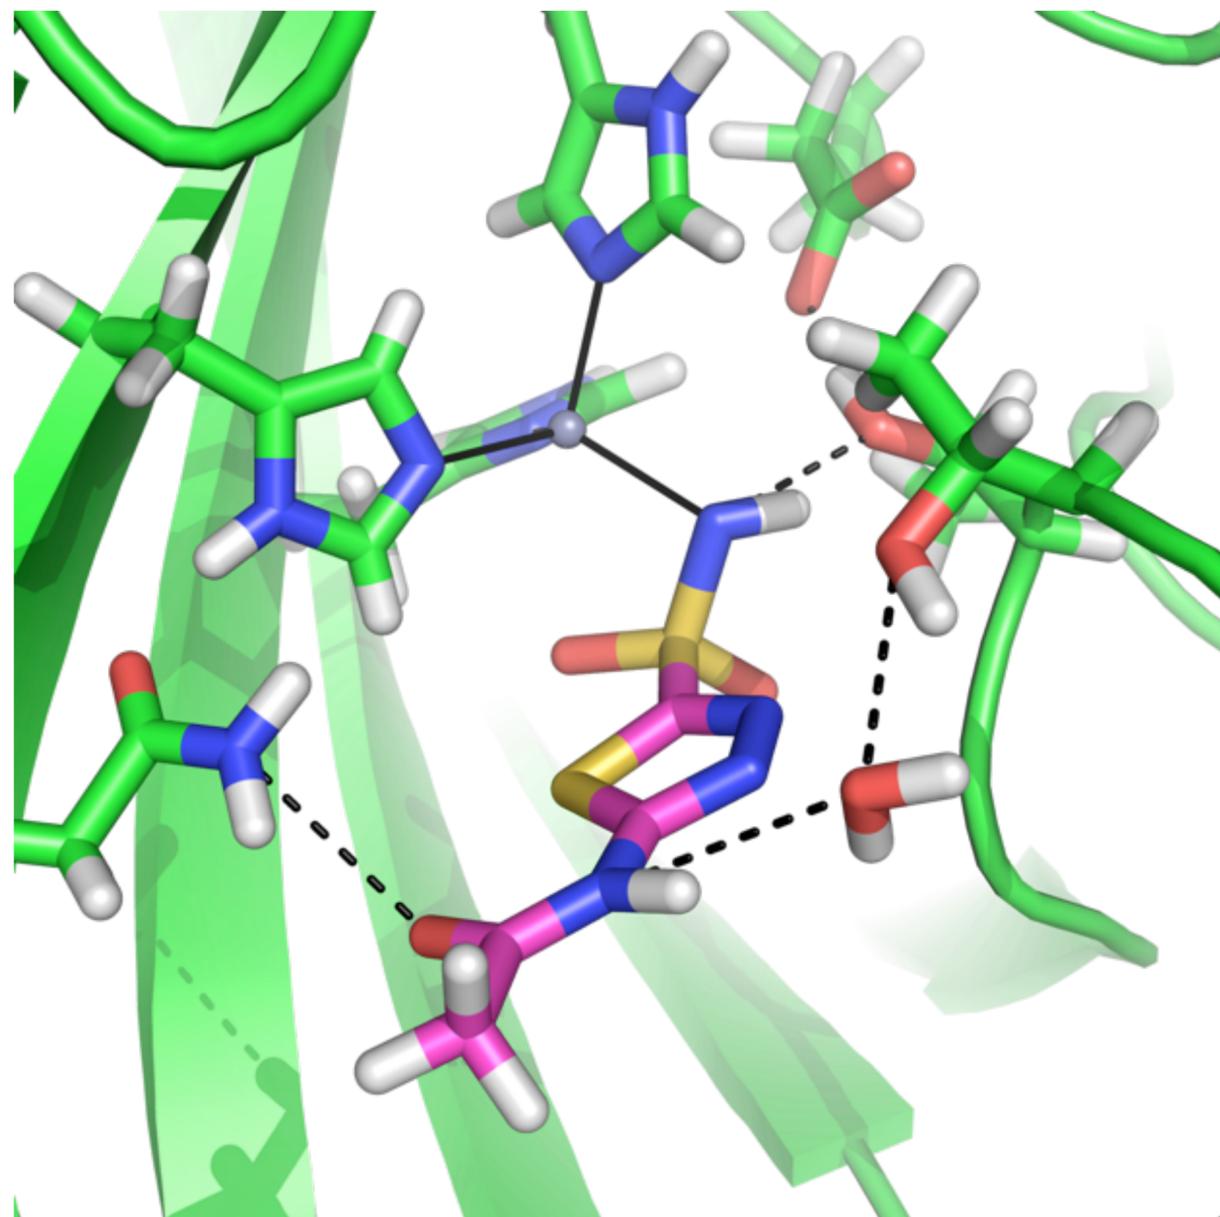

- This enzyme transports CO₂ and regulates blood pH.
- It is a major player in some cancers, glaucoma, obesity and high blood pressure.
- Neutron crystallography pinpoints protons and waters, showing how the drug Acetazolamide binds.

ALMOST ALL ESS IN ONE SLIDE



Key Linac parameters


Energy	2.0 GeV
Current	62.5 mA
Repetition rate	14 Hz
Pulse length	2.86 ms
Losses	<1W/m
Ions	p

Flexible/Upgradable design

Minimize energy consumption

Controls

Control variables.	~1.6E6 PVs
MPS and PSS	
EPICS7	
μTCA.4	

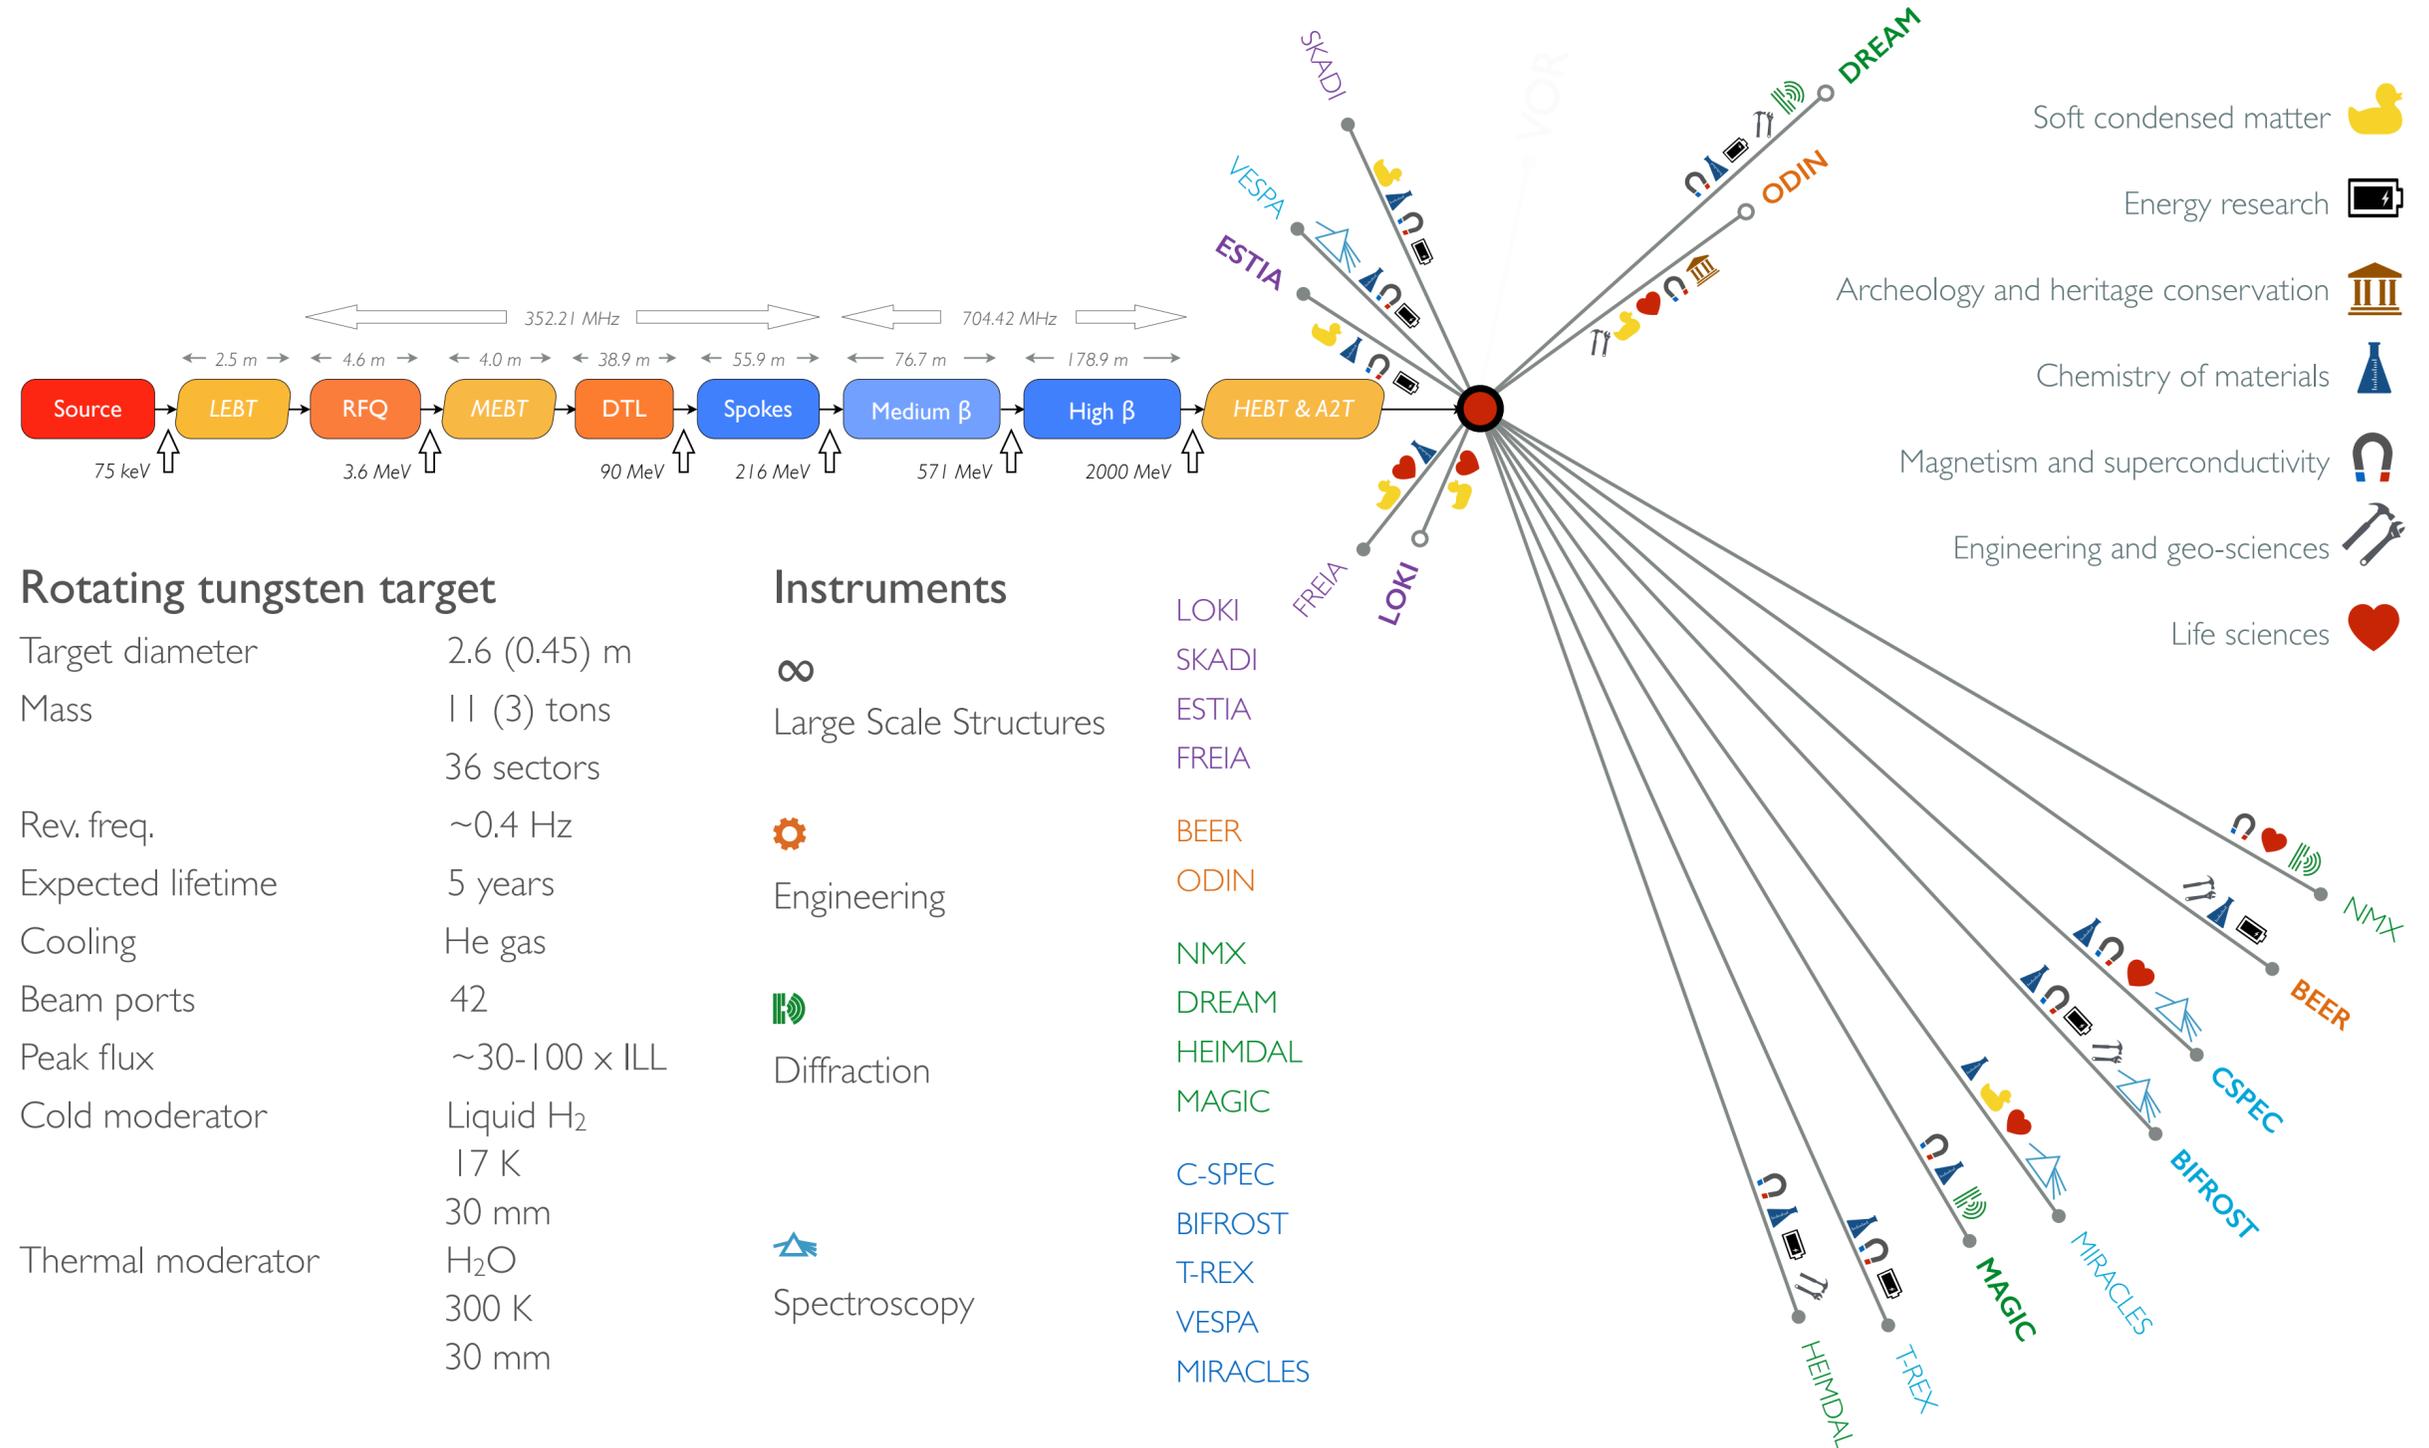



Rotating tungsten target

Target diameter	2.6 (0.45) m
Mass	11 (3) tons
Rev. freq.	~0.4 Hz
Expected lifetime	5 years
Cooling	He gas
Beam ports	42
Peak flux	~30-100 x ILL
Cold moderator	Liquid H ₂ 17 K 30 mm
Thermal moderator	H ₂ O 300 K 30 mm

Instruments

∞	LOKI
Large Scale Structures	SKADI
	ESTIA
	FREIA
⚙️ Engineering	BEER
	ODIN
👂 Diffraction	NMX
	DREAM
	HEIMDAL
	MAGIC
🔭 Spectroscopy	C-SPEC
	BIFROST
	T-REX
	VESPA
	MIRACLES



PROGRESS AT ESS

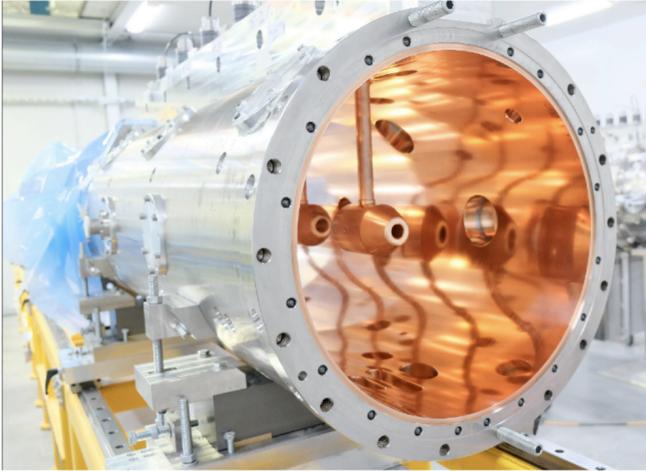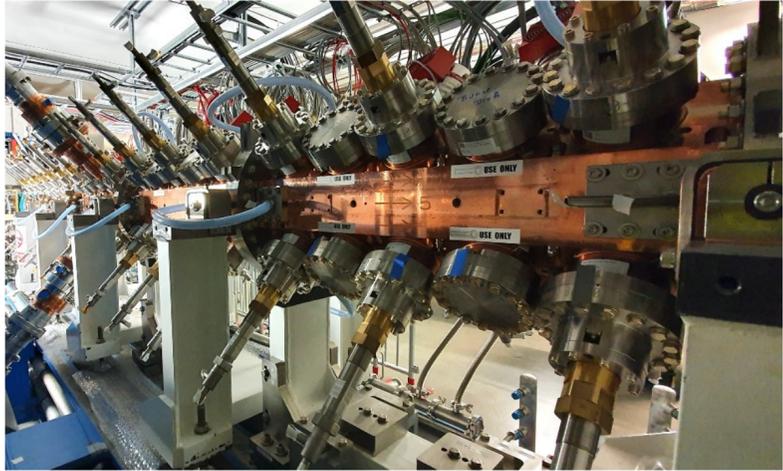

ESS, ESS-Bilbao, CEA

Call/Activity: A H2020 EU Design Study (Call INFRADEV-01-2017)
Title of Proposal: Discovery and measurement of leptonic CP violation using an intensive neutrino Super Beam generated with the exceptionally powerful ESS linear accelerator
Proposal number: 777419
Proposal acronym: ESSnuSB
Funding scheme: RIA
Duration: 4 years
Total cost: 4.7 M€
Requested budget: 3 M€
Participants: 15 participating institutes from 11 European countries including CERN and ESS
 6 Work Packages
 Approved end of August 2017; 2018-2021 → Conceptual Design Report end of 2021


N.	Proposer name	Country
1	CENTRE NATIONAL DE LA RECHERCHE SCIENTIFIQUE CNRS	FR
2	UPPSALA UNIVERSITET	SE
3	KUNGLIGA TEKNISKA HOEGSKOLAN	SE
4	EUROPEAN SPALLATION SOURCE ERIC	SE
5	UNIVERSITY OF CUKUROVA	TR
6	UNIVERSIDAD AUTONOMA DE MADRID	ES
7	NATIONAL CENTER FOR SCIENTIFIC RESEARCH "DEMOKRITOS"	EL
8	ISTITUTO NAZIONALE DI FISICA NUCLEARE	IT
9	RUDER BOSKOVIC INSTITUTE	HR
10	SOFIISKI UNIVERSITET SVETI KLIMENT OHRIDSKI	BG
11	LUNDS UNIVERSITET	SE
12	AKADEMIA GORNICZO-HUTNICZA IM. STANISLAWA STASZICA W KRAKOWIE	PL
13	EUROPEAN ORGANIZATION FOR NUCLEAR RESEARCH	CH
14	UNIVERSITE DE GENEVE	CH
15	UNIVERSITY OF DURHAM	UK
Total:		

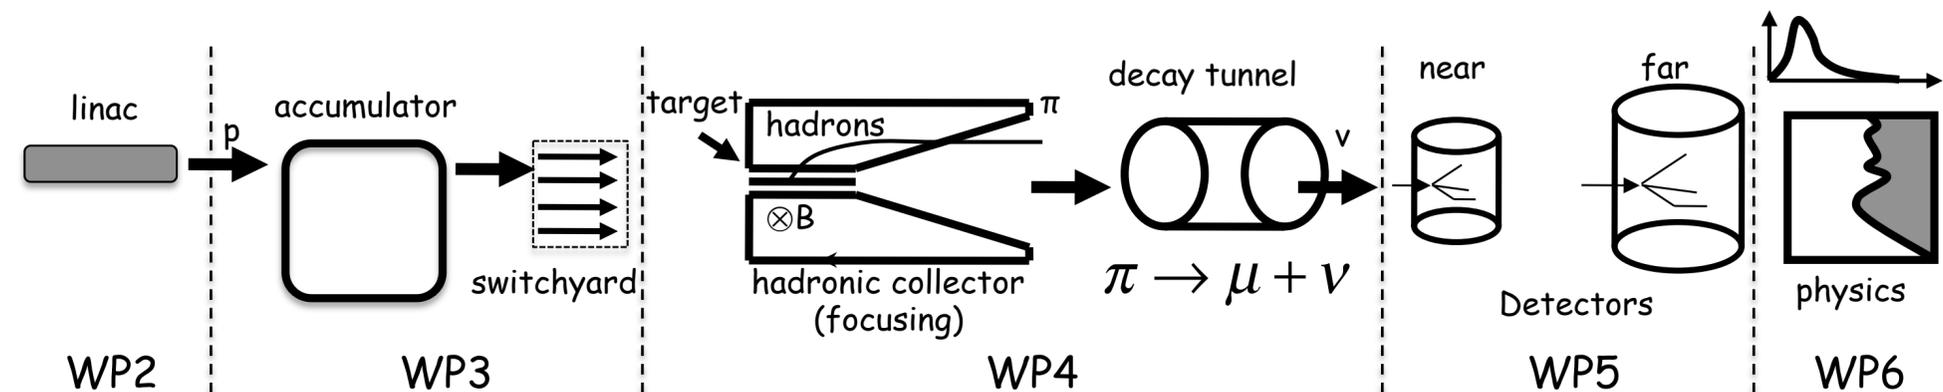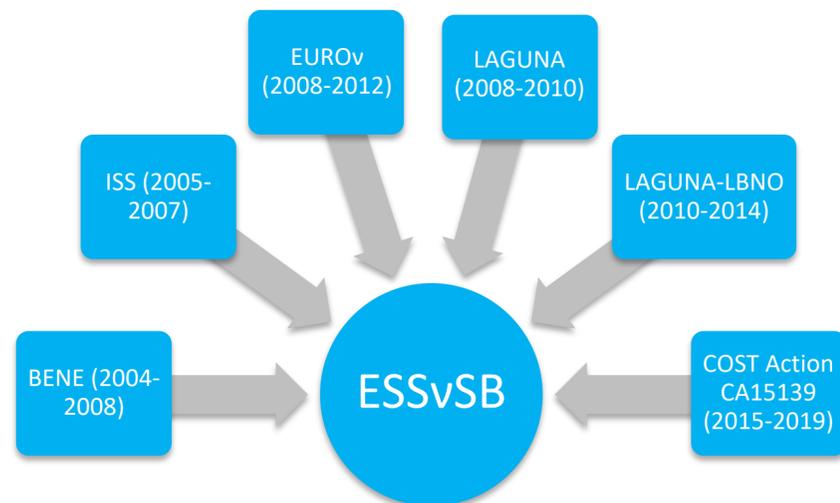

More information on: <http://essnusb.eu/>



Marcos Dracos

LUND TO GARPENBERG VIA ZINKGRUVAN

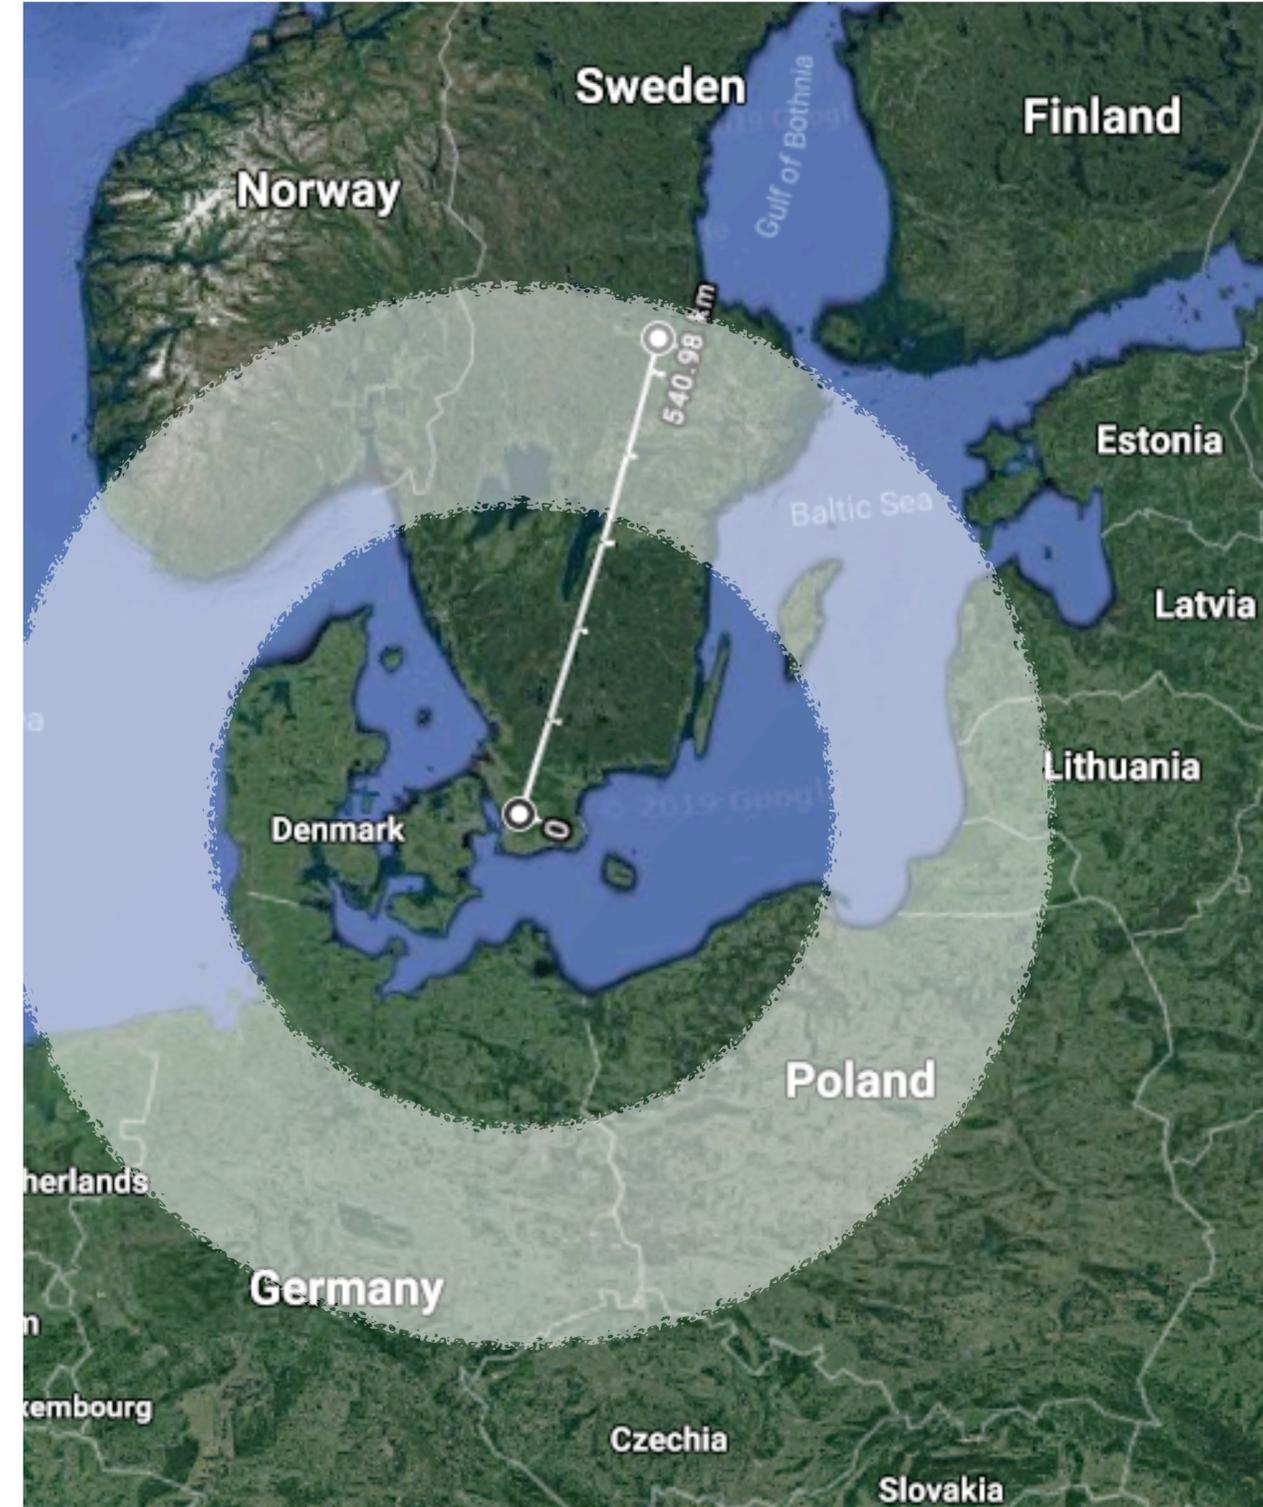

ESSnuSB has received funding from the European Union's Horizon 2020 research and innovation programme under grant agreement No 777419

CHAMELEONS OF PARTICLE PHYSICS

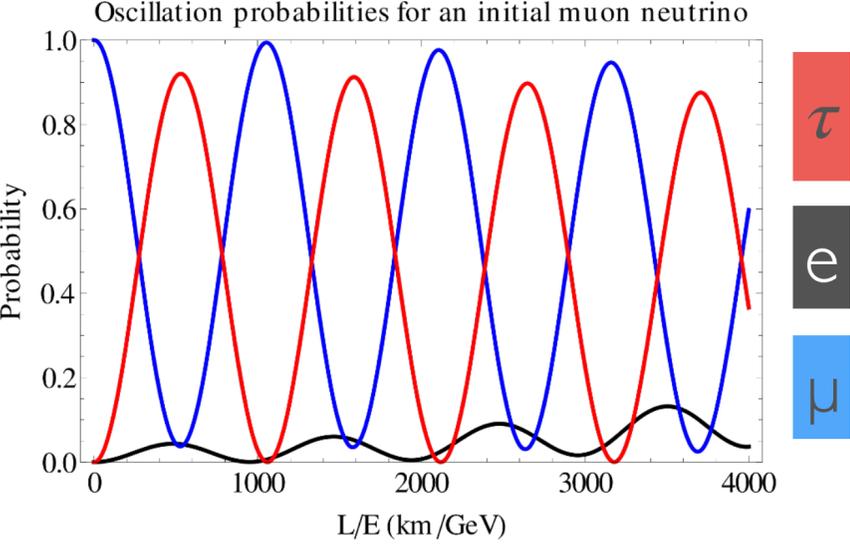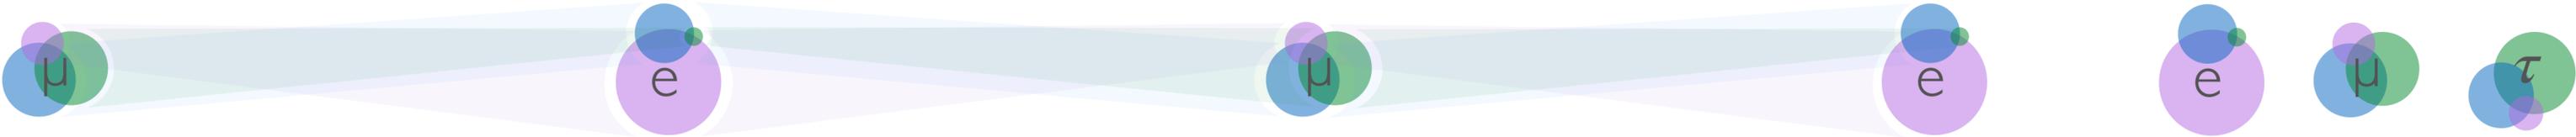


ESSnuSB has received funding from the European Union's Horizon 2020 research and innovation programme under grant agreement No 777419

TOP LEVEL PARAMETERS



Design Drivers:

High average beam power 5 MW
 High peak beam power 125 MW
 High availability >95 %




Key Linac parameters:

Energy 2.0 GeV
 Current 62.5 mA
 Repetition rate 14 Hz
 Pulse length 2.86 ms
 Losses <1W/m
 Ions p








ESSnuSB beam:

Energy 2.5 GeV
 Current 62 mA (50 mA)
 Repetition rate 14 Hz (x 4)
 Pulse length <3.5 ms
 Losses <1W/m
 Ions H-

Flexible/Upgradable design
 Minimize energy consumption

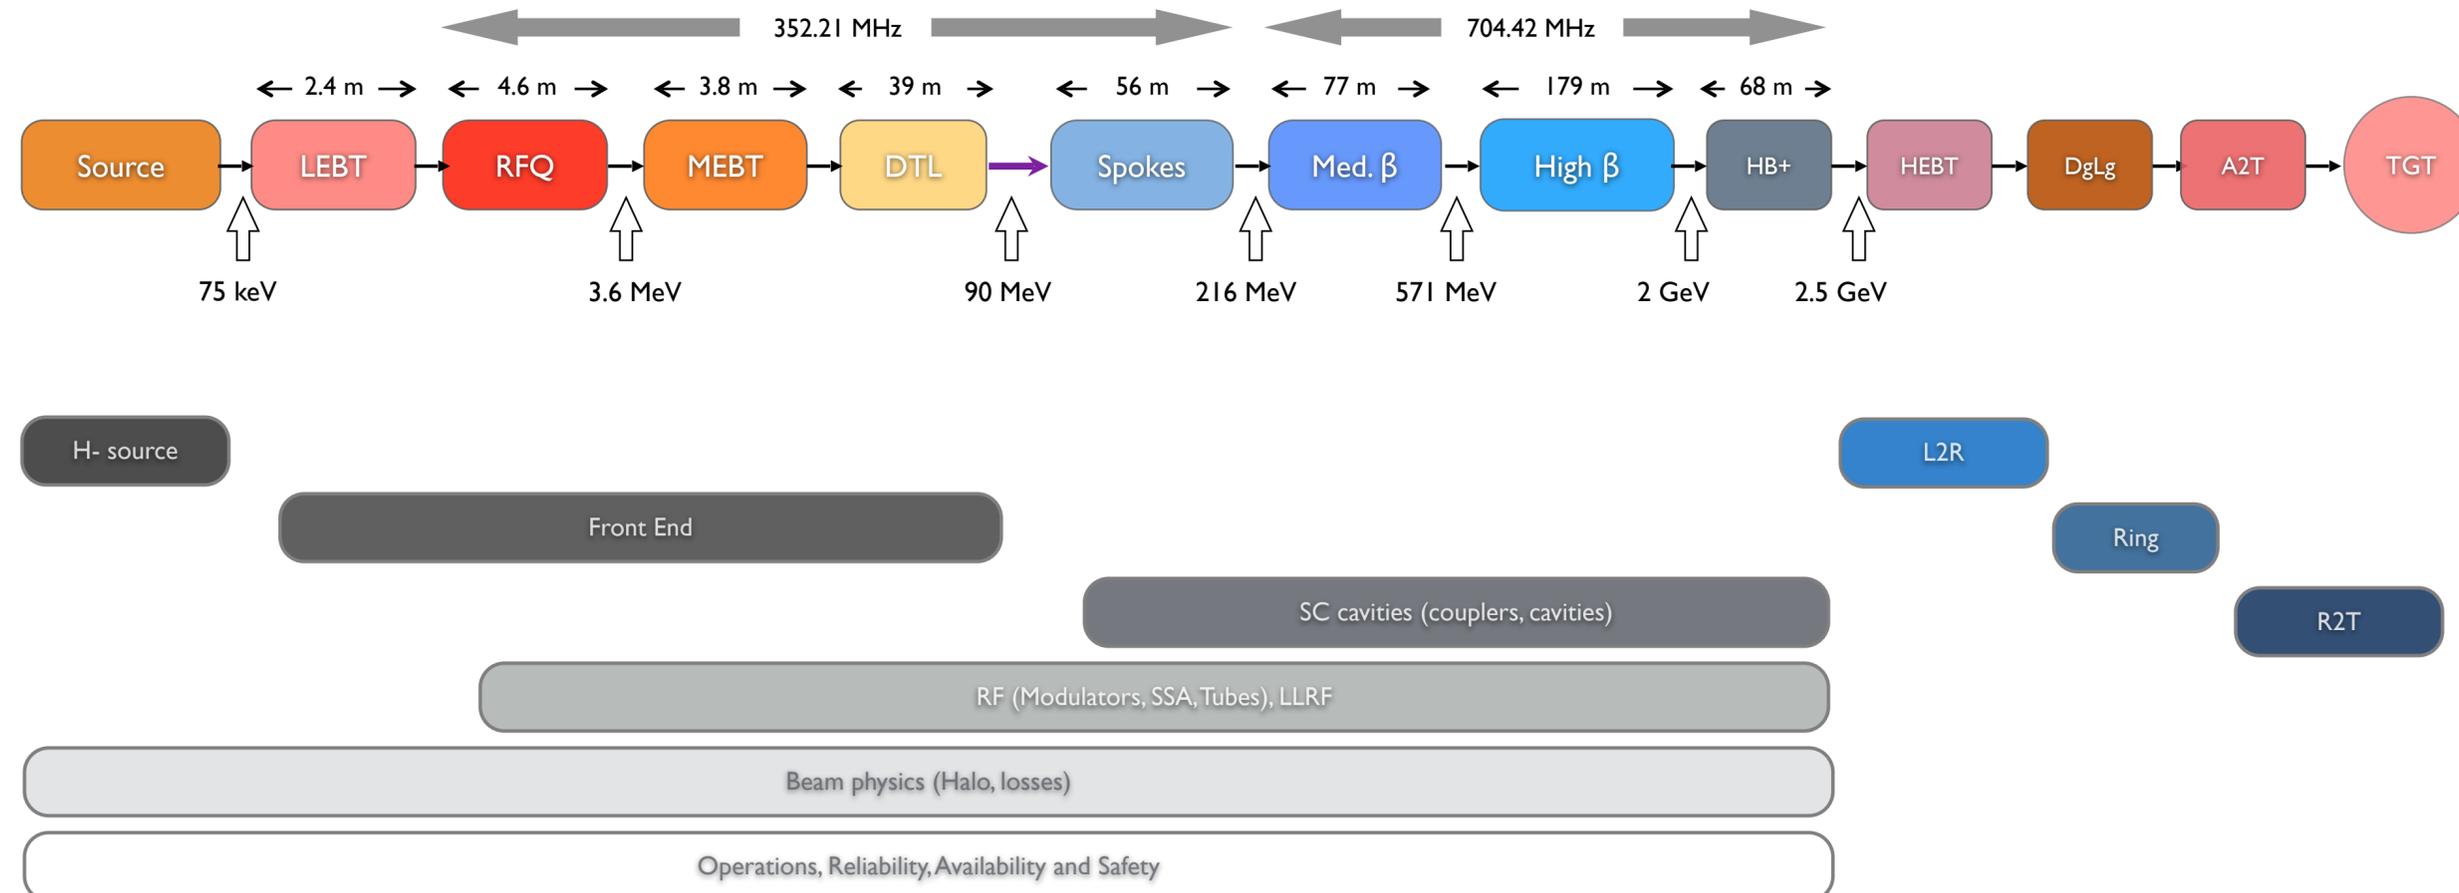


H- TRANSPORT AND LOSSES

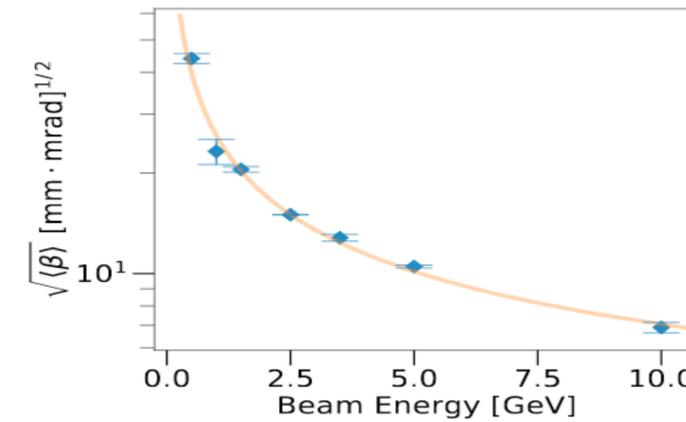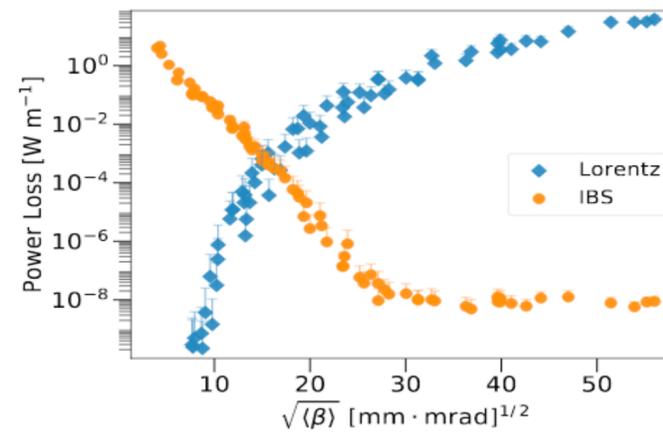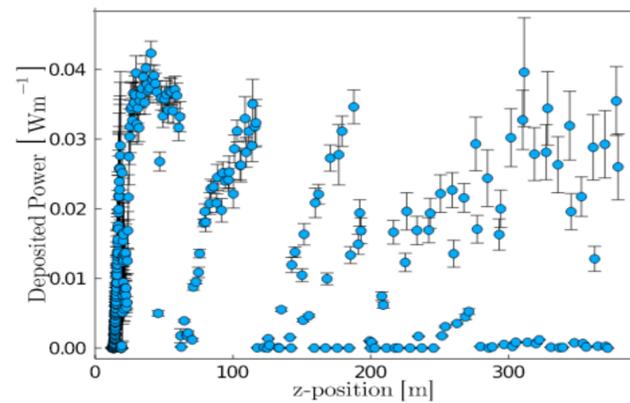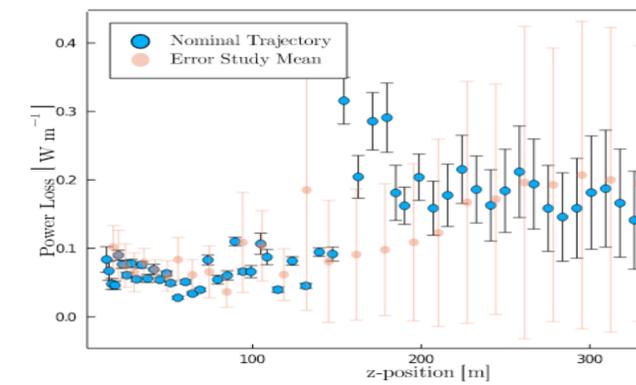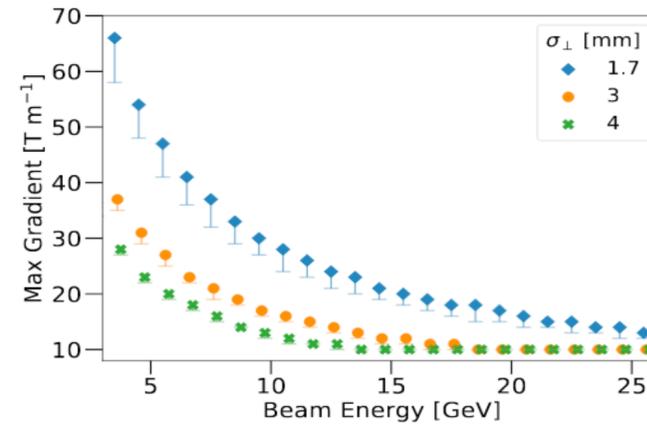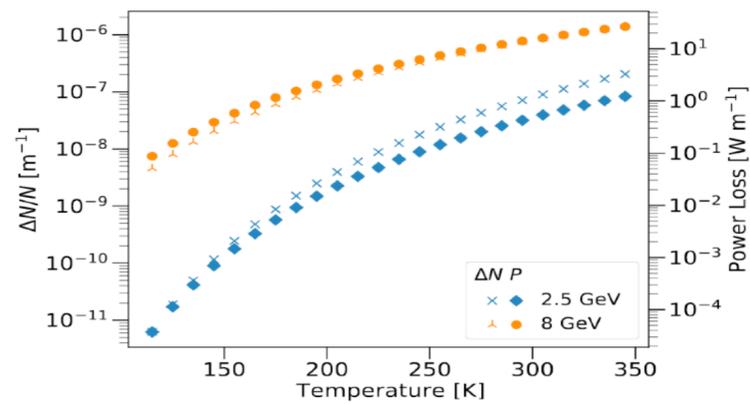
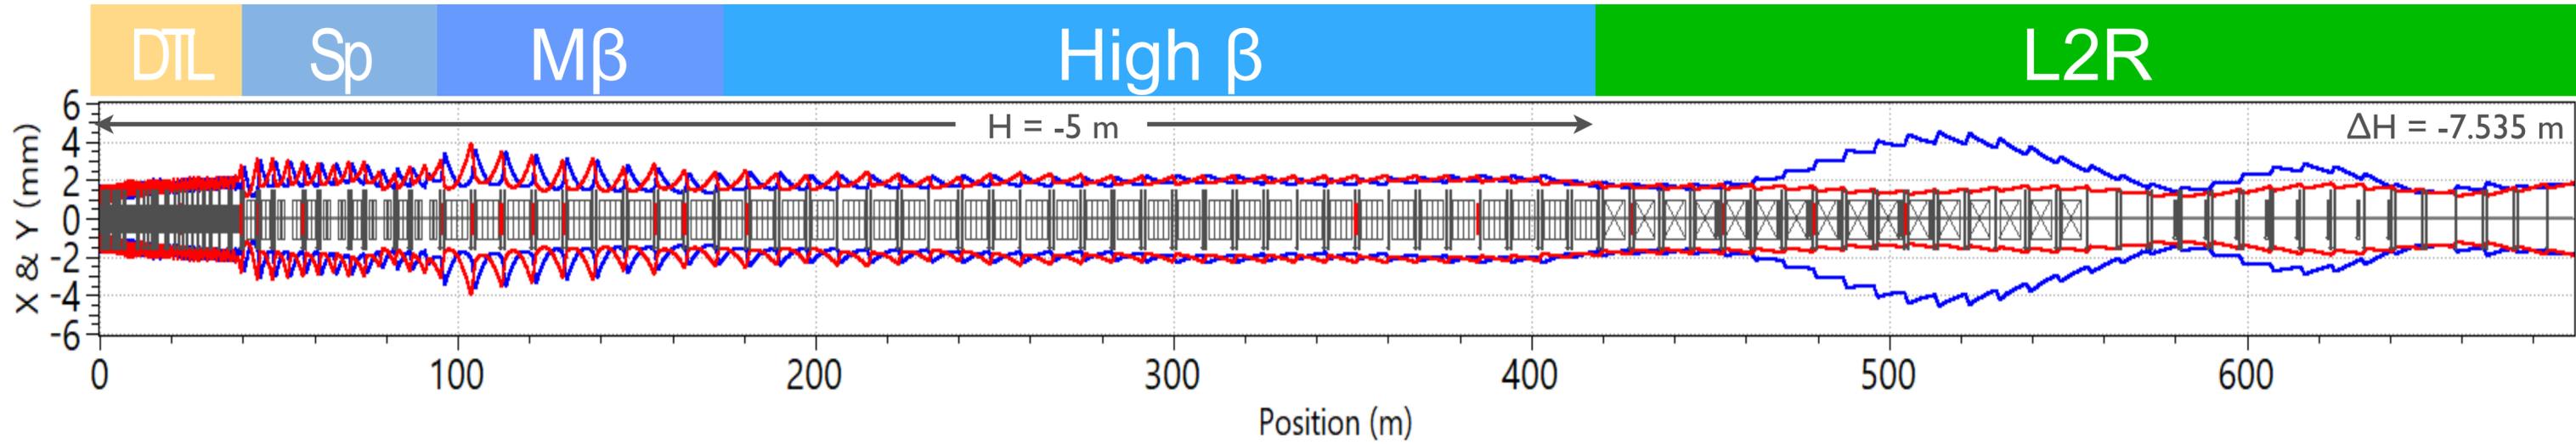


B. Folsom, N. Blaskovic, B Gålnander, M. Eshraqi, Paper to be published,


PULSING IN THE LINAC, RING AND TARGET

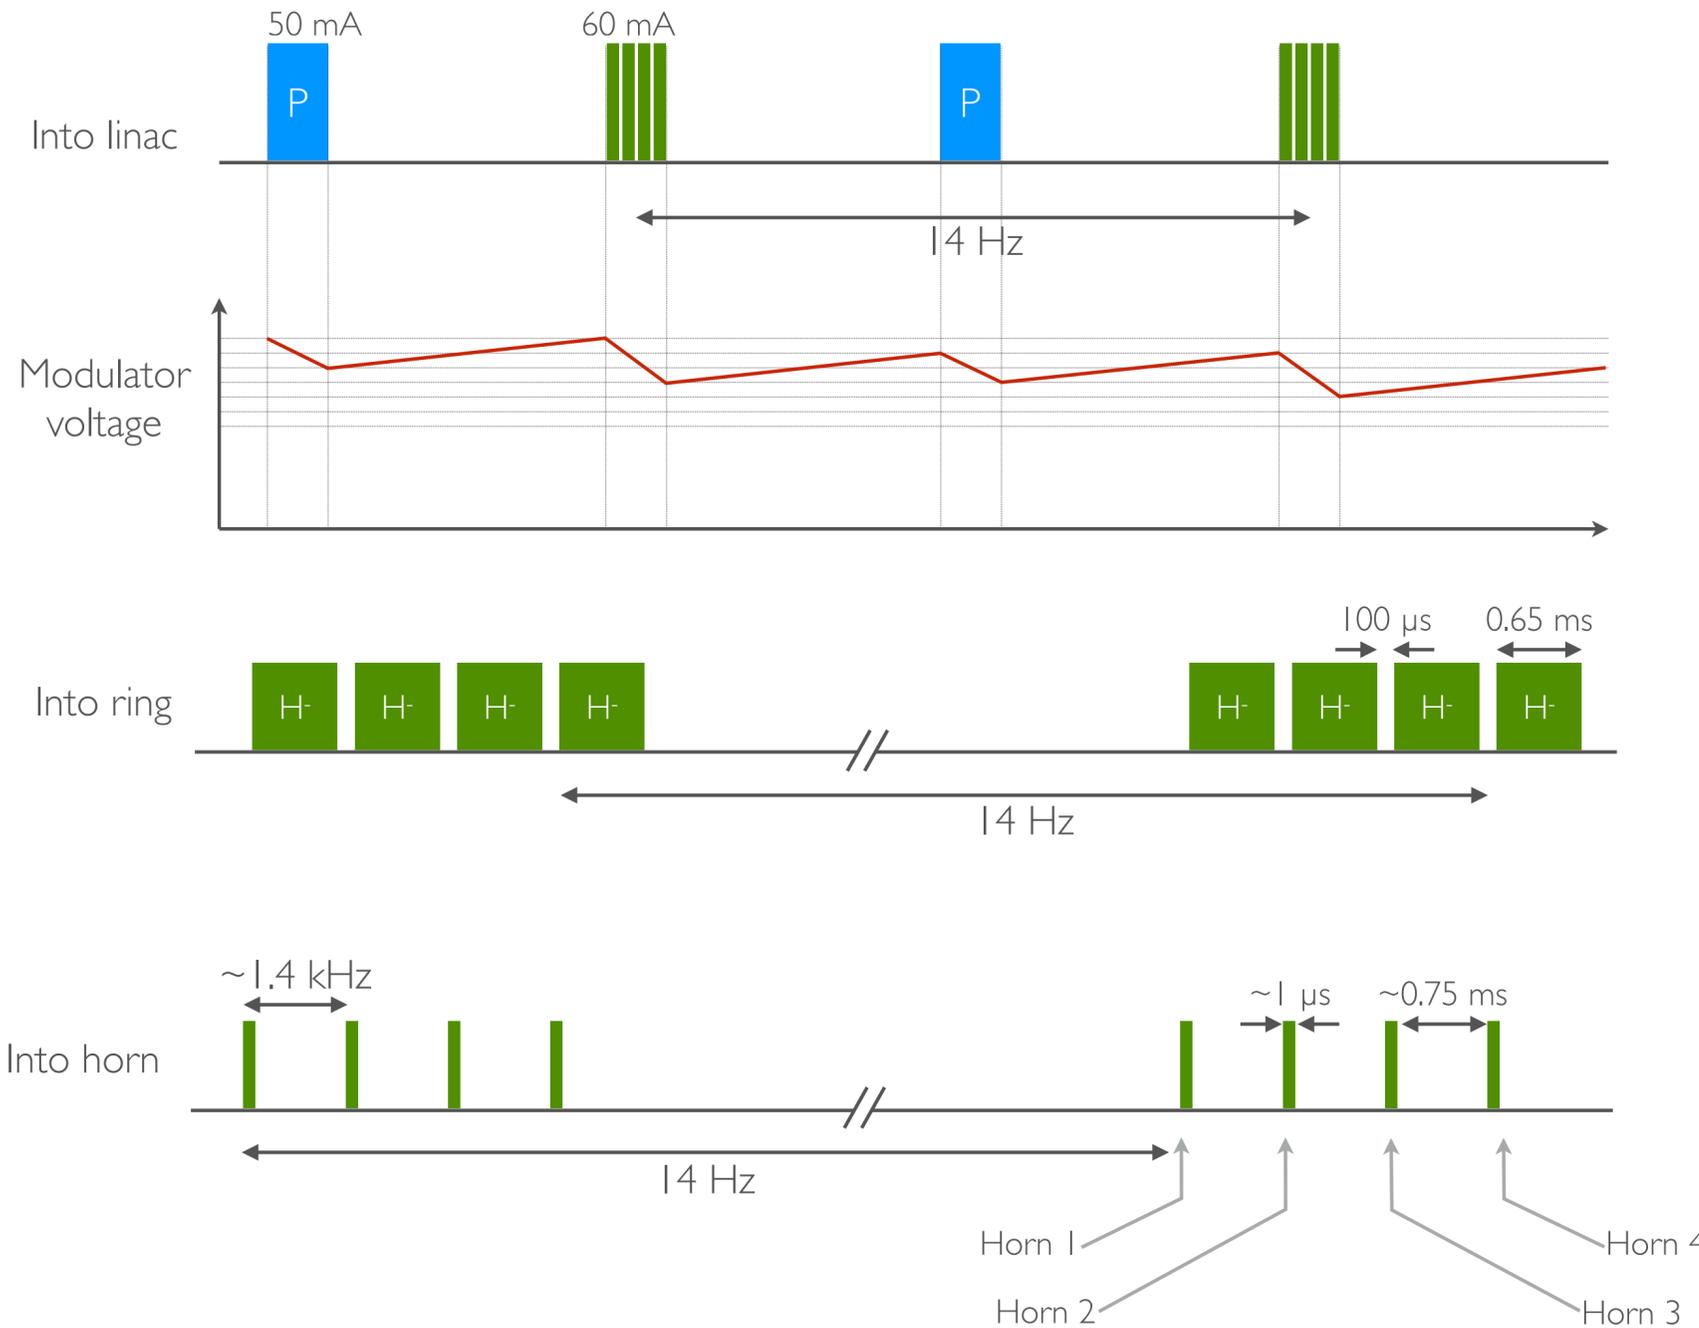

- Possibility of merging the two beams at 70 Hz (cases B and C).

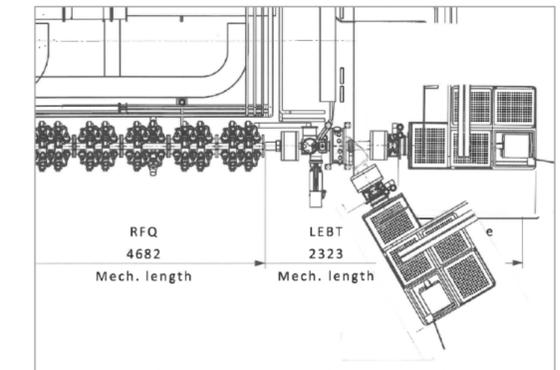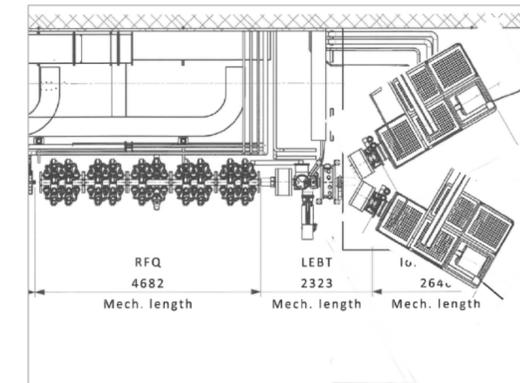



- B field: 0.1 T
- Bending radius: 400 mm
 - pole gap: 100 mm
- A coil with 100 turns
 - Inductance: 17 mH
 - possible to switch at 70 Hz
- Power supply:
 - Current: 80 A
 - Voltage: 170 V

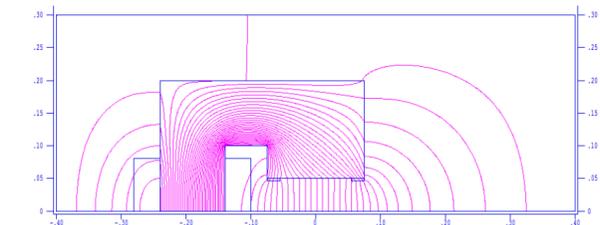

Håkan Danared, Björn Gålnander

- Two different power upgrades for the modulators have been studied:
 - Using the SML modulators of ESS and upgrading the capacitor chargers
 - Using the SML modulators of ESS and adding pulse transformers for the H- beam

Scenario	Solution	Eta	Investment cost [M€]	Electricity cost per year [M€/y]	Increased system footprint [m ²]	Total system height [m]	H ⁻ pulse rise time [μs]
A	SML upgr.	0.82	13.4	14.6	0	3.1	< 120
B	SML upgr.	> 0.80	13.4	14.8	0	3.1	< 80
	SML + PT	> 0.80	26.3	14.8	< 2.5 × 1.5	2.4	60-120
C	SML upgr.	> 0.71	13.4	16.7	0	3.1	< 170
	SML + PT	> 0.72	26.6	16.5	< 2.5 × 1.5	2.4	50-120
Baseline	SML	0.82	N/A	7.30	N/A	2.6	N/A

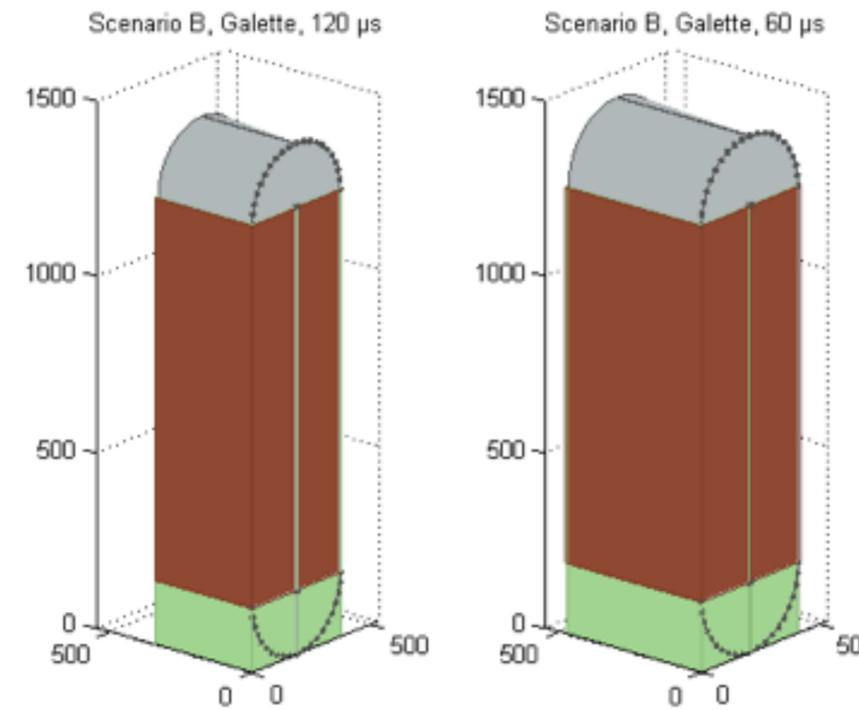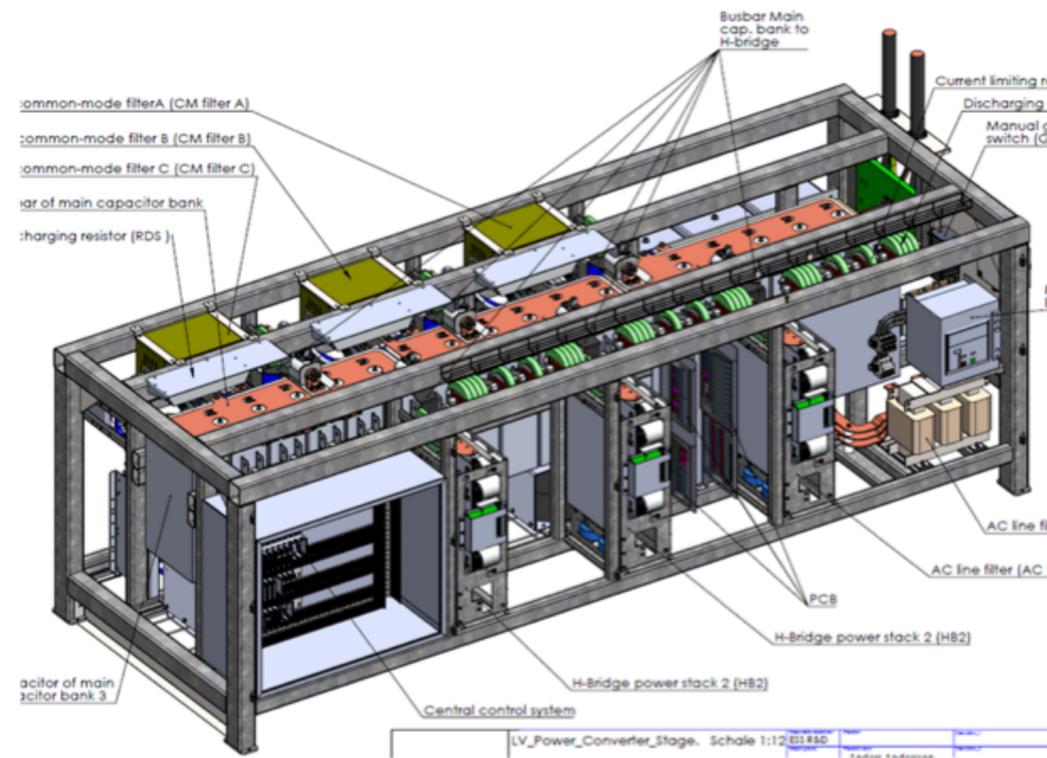

- **Main challenges**


- Beam loss control due to very high beam power
- Space-charge tune shift due to very high beam intensity
- Instabilities (e-p instability)

- **Main design requirements**

- Ring circumference: ~ 400 m
- Injection turns: ~ 600
- Extraction gap: ~100 ns
- Total beam loss (l W/m): 10^{-4}
- Collimation efficiency: >90%
- Space-charge tune shift: <math><0.1</math>

- **Lattice design**

- Developed by Horst Schönauer at CERN
- Circumference: 384 m
- 4-fold symmetry
- 4 straight sections (SS1~SS4) and 4 arc sections (Arc)
- Fixed injection chicane and fast programmable bump for injection painting

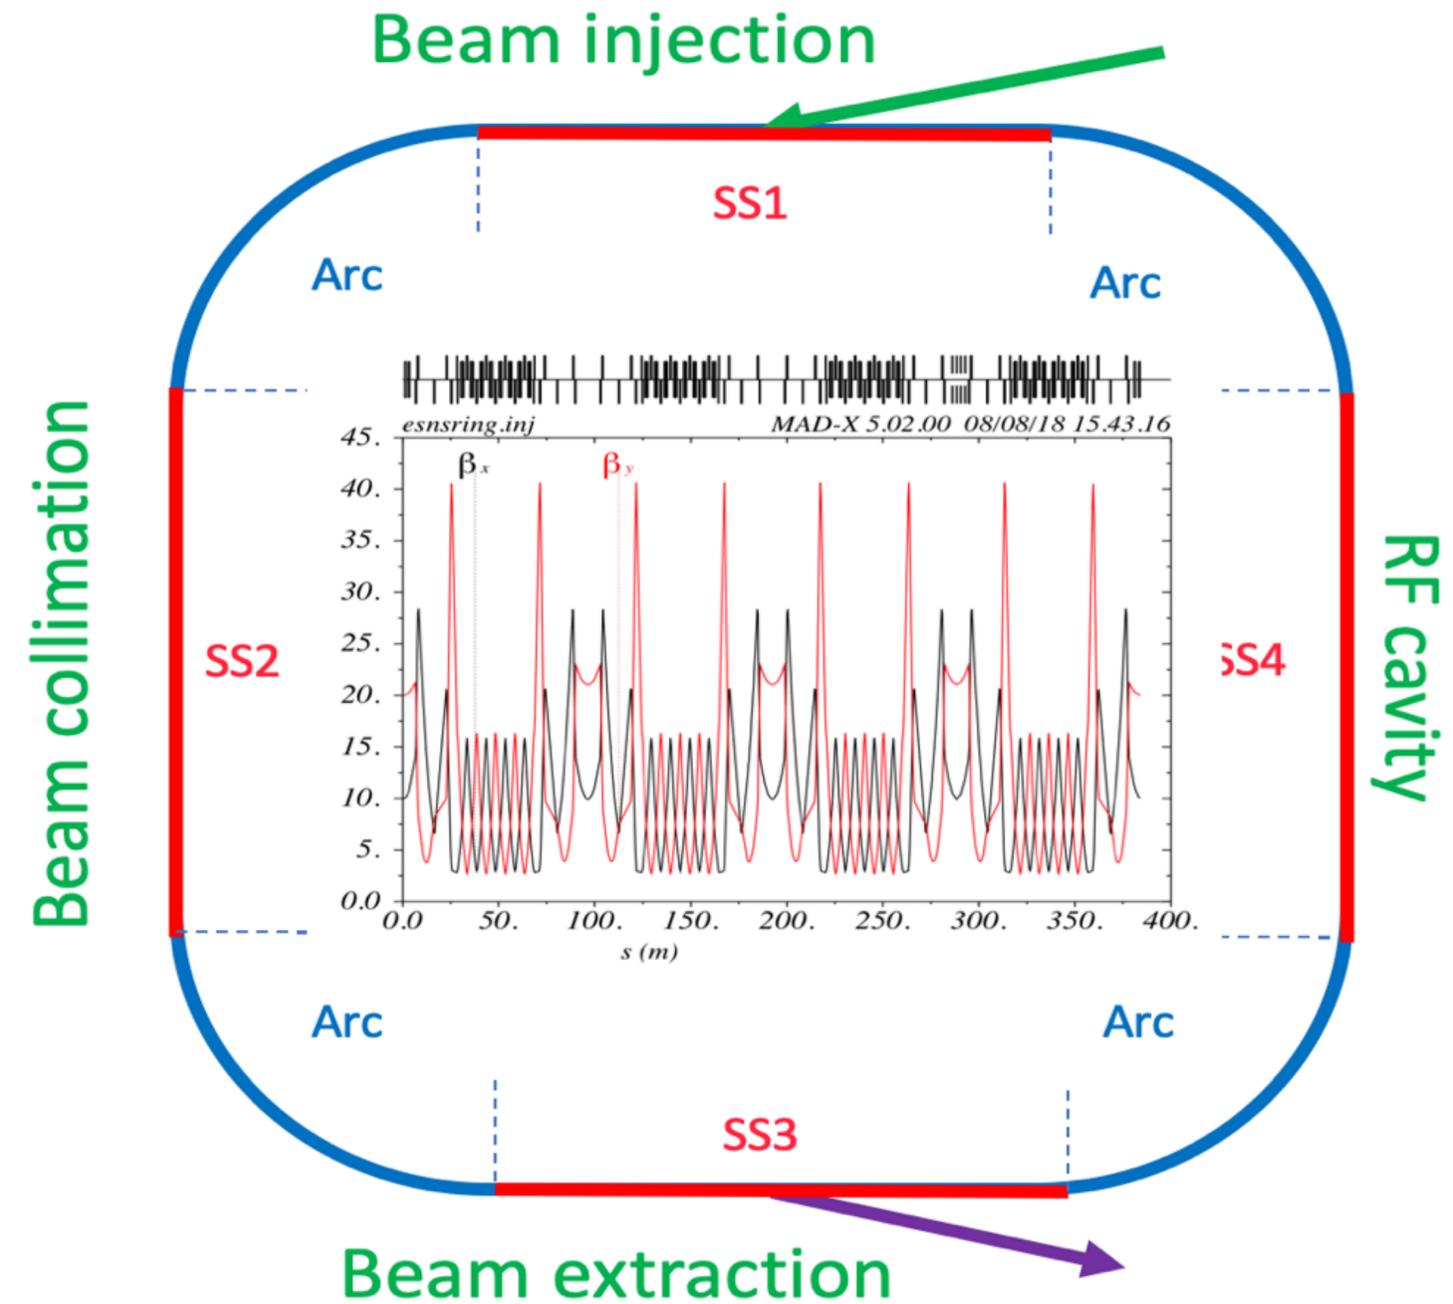

- **Foil stripping and laser stripping**




- Foil stripping: widely used in proton synchrotrons or accumulators, very challenging due to high power
- Laser stripping: a promising alternative method

- **Painting**

- Mitigate space charge issue
- Mitigate foil temperature issue

- **Foil temperature issue mitigation**

- Mismatch injection
- Splitting the foil along beam direction
- Moving injection point

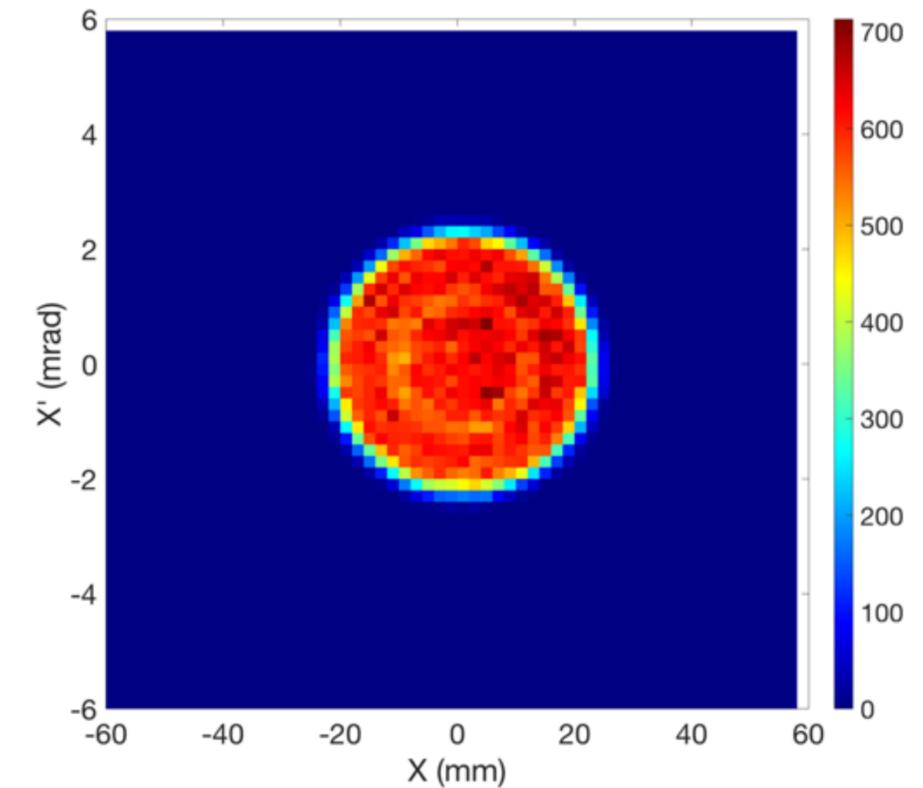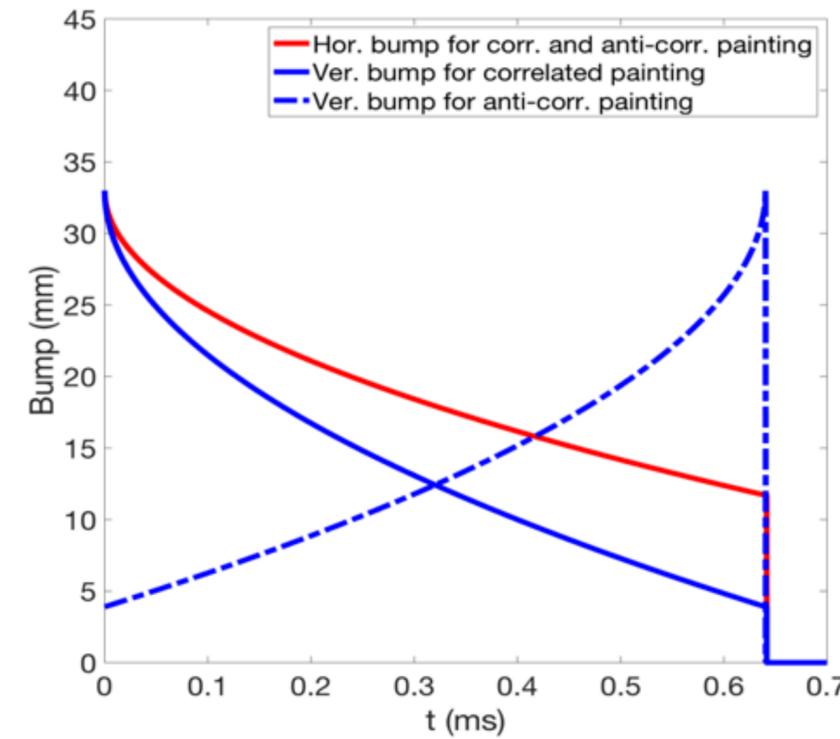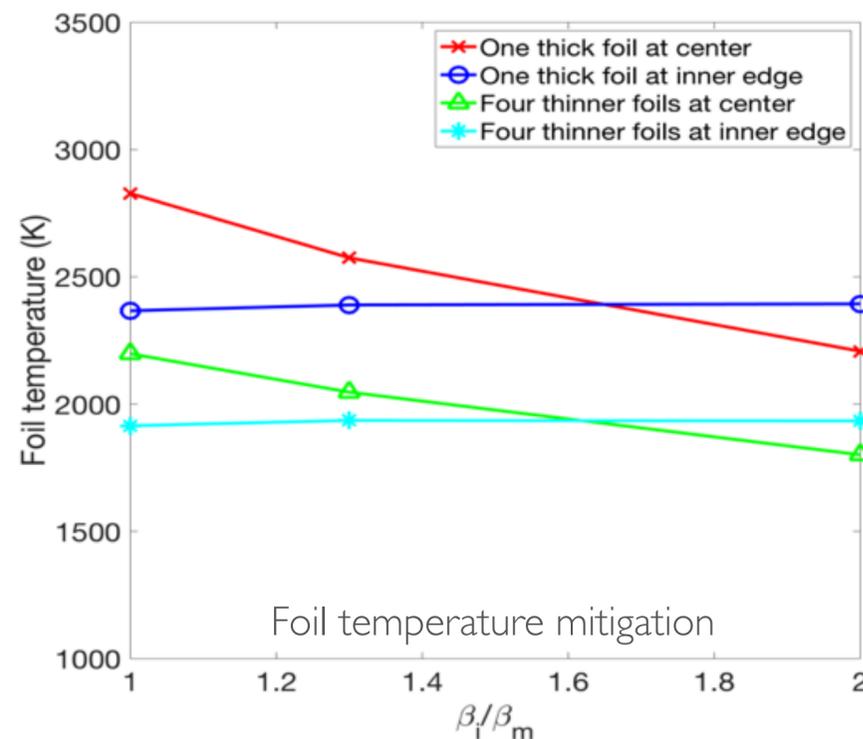

- Painting to quasi-uniform beam, with 100% emittance of 60π mm mrad in both planes
- Very small tune spread (~ 0.05)
- Foil temperature under 2000 K

- **Two-stage collimation system:**

- A thin primary collimator to scatter beam halo particles
- followed by a set of secondary collimators at optimal locations to absorb the scattered particles

- **Materials:**

- Primary: Tantalum
- Secondary: Tungsten or Copper

- **Thickness/length:**

- Primary: 6 mm
- Secondary: 1.5 m



- **Collimator acceptance:**

- Primary/Secondary: 70/120 π mm mrad

- Optimal phase advances between primary and secondary collimators to maximize interception efficiency

- Numerical simulations to evaluate the performance of the collimation system

Two-stage collimation system with 97% efficiency

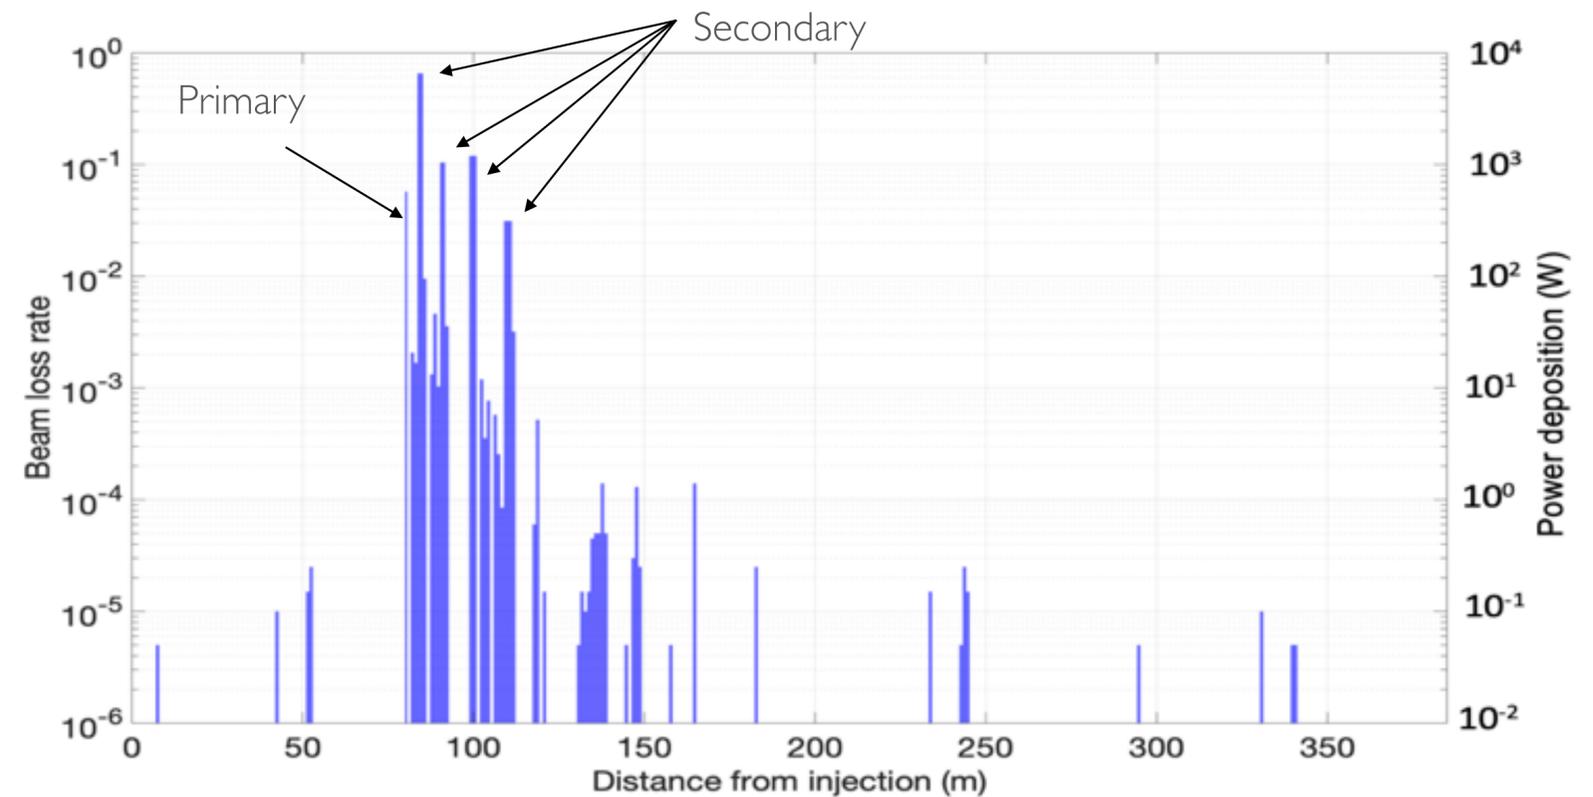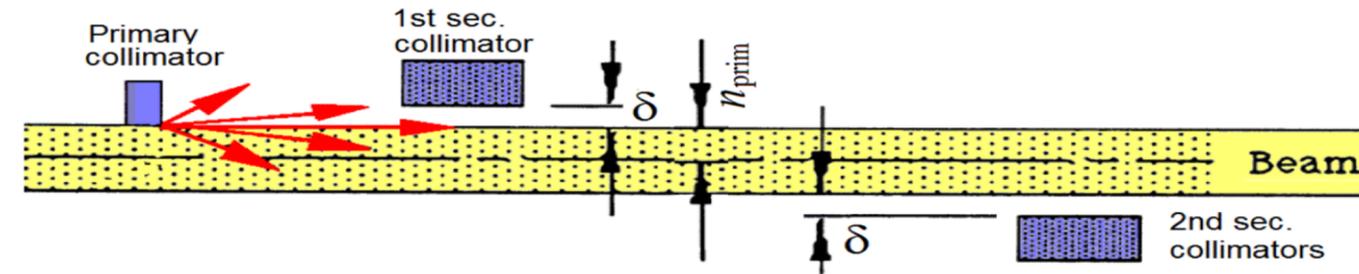

Beam loss map

BEAM EXTRACTION, RF AND SWITCHYARD



- **Beam extraction**

- Single-turn extraction system is designed to extract the full beam in a single turn after accumulation
- Fast magnets (kickers) to extract the beam vertically out of the ring during the extraction gap of 100-130 ns
- Horizontal deflector (septum) to deflect the beam by 16.8 deg to the start of the extraction line

- **Challenges**


- Loss-free extraction \Rightarrow optimize aperture sizes
- Rise-time of kickers \Rightarrow aperture size, B-field, technology

- **RF cavity**



- RF cavity to keep the extraction gap clean while keep energy spread small
- Barrier bucket is chosen due to its very small leakage risk and small energy spread ($\pm 0.15\%$)
- Aperture optimized to make rise-time requirement easier to reach

- **Switchyard**

- Switch and direct the beam pulses to the 4 horns

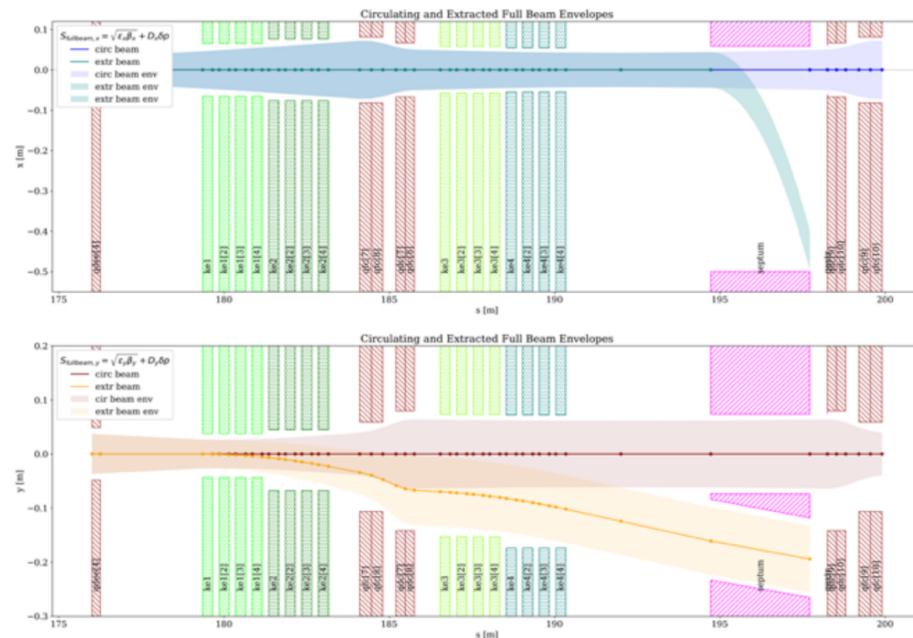


The circulating and extracted beam trajectories and beam envelopes (100% acceptance)

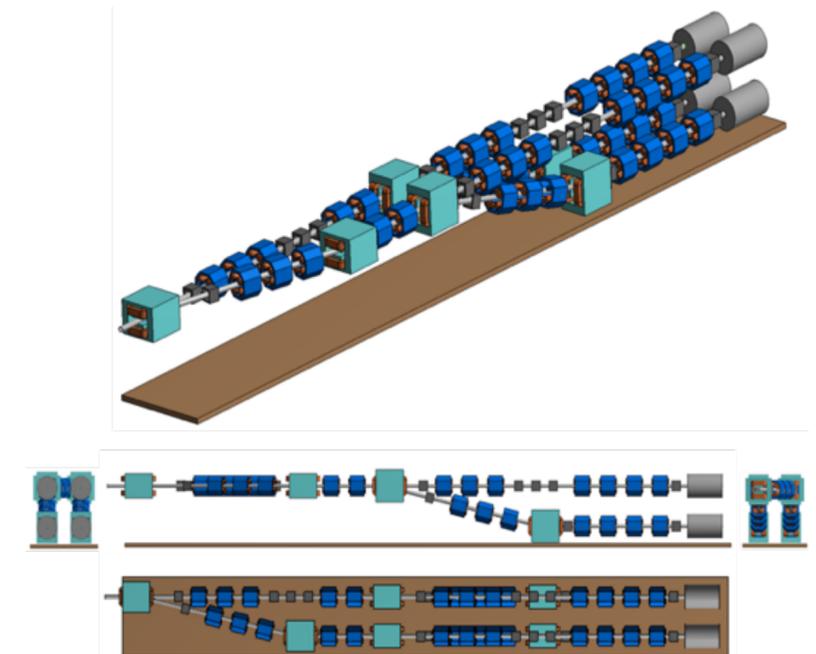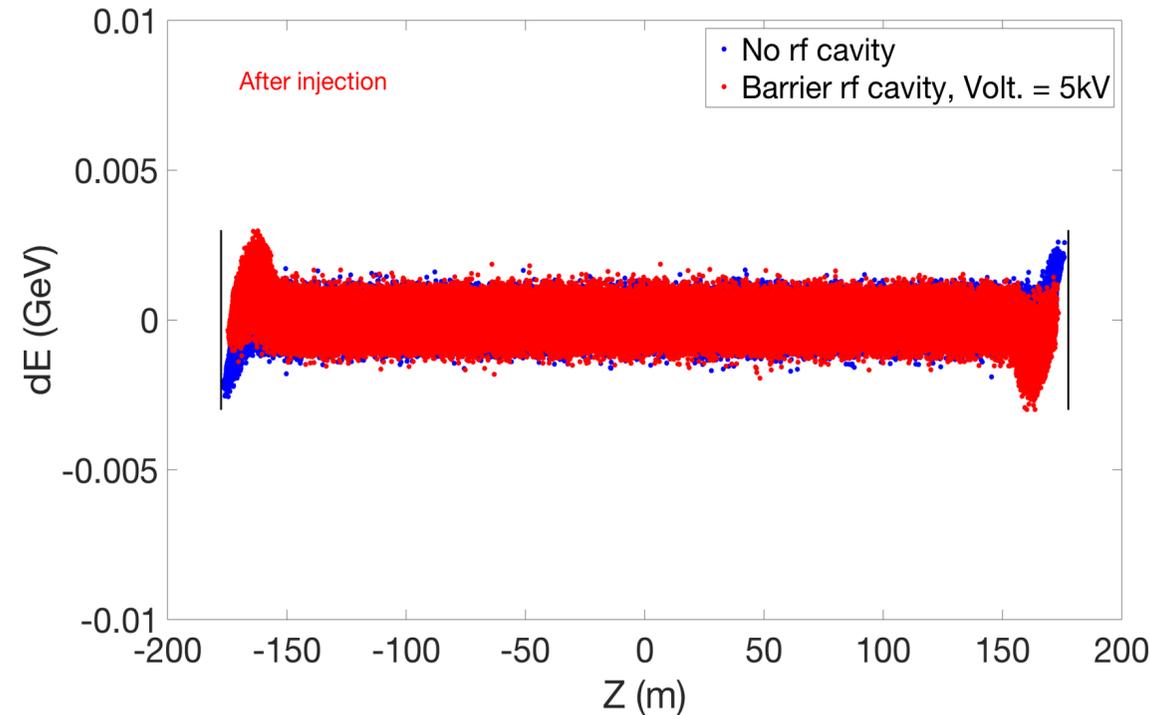

A. Alekou, I. Efthymiopoulos, Y. Zou, E. Bouquerel

TARGET STATION DESIGN

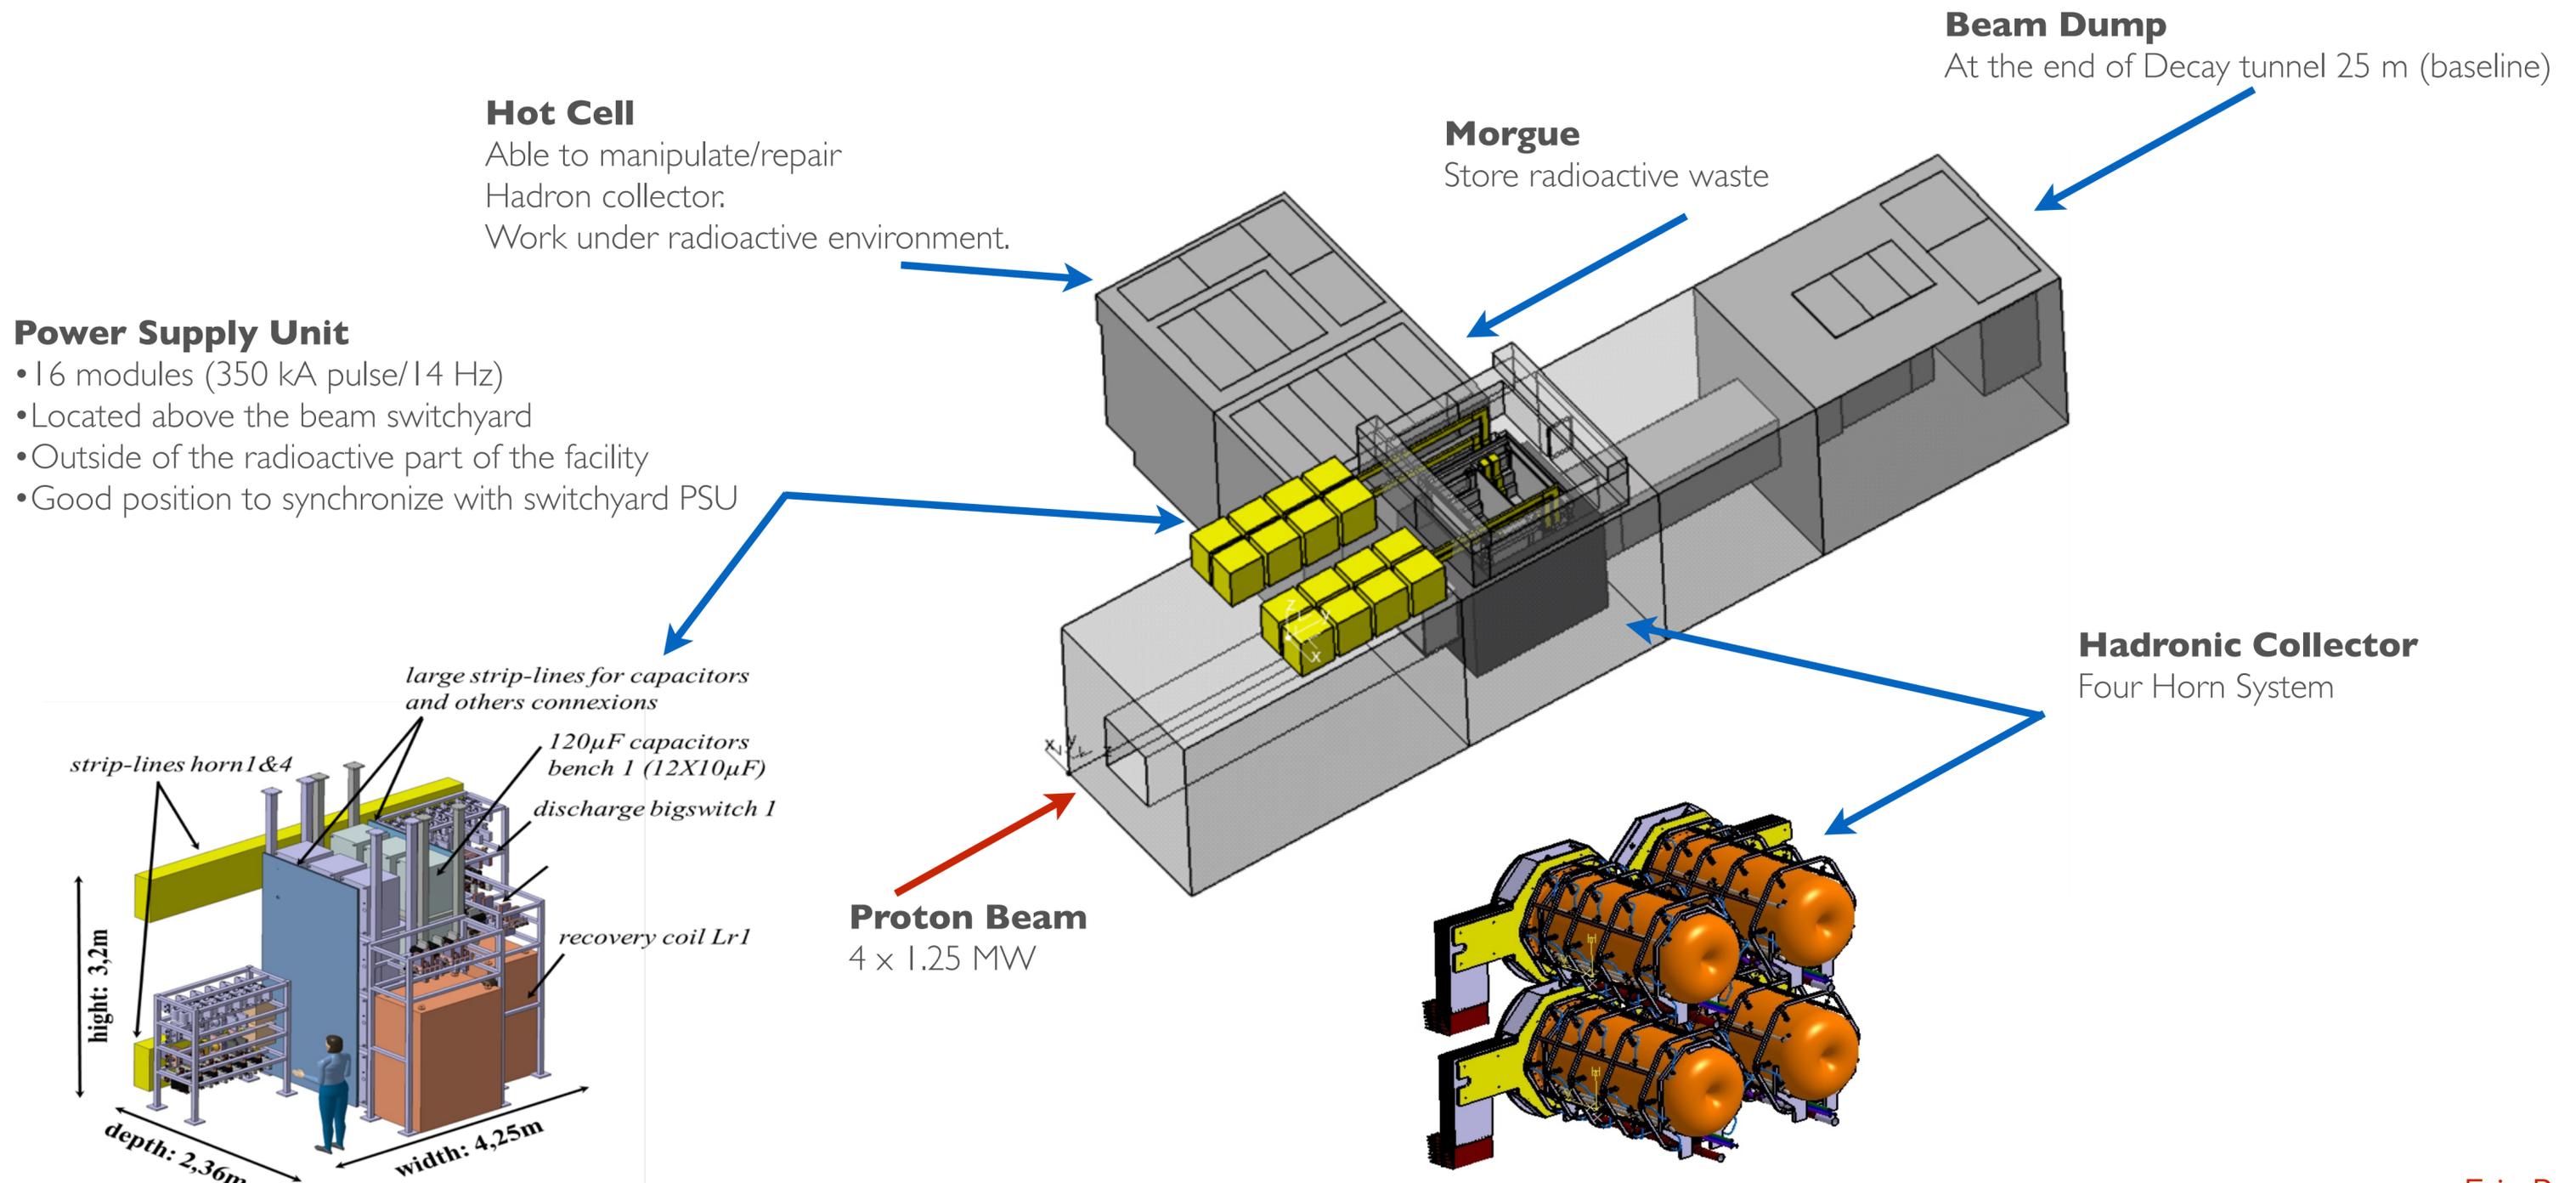

HADRONIC COLLECTOR






- **Packed Bed Target**


- Power 1.25 – 1.6 MW
- Potential heat removal rates at the hundreds of kW level
- Helium cooling (10 bars)
- Separated from the horn

- **Focusing System**

- 4-horn/target system to accommodate the MW power scale
- Solid target integrated into the inner conductor : very good physics results but high energy deposition and stresses on the conductors
- Best compromise between physics and reliability

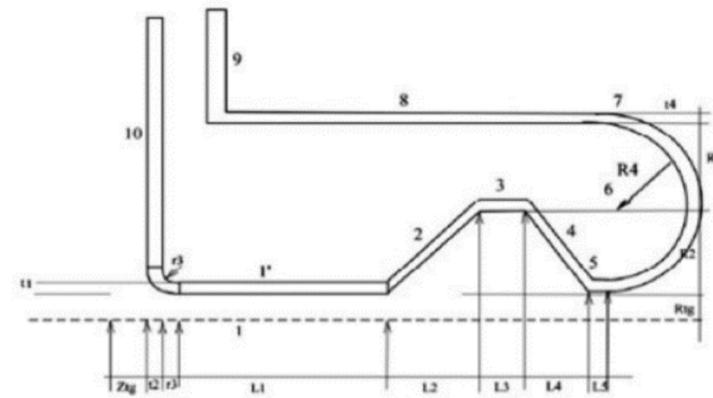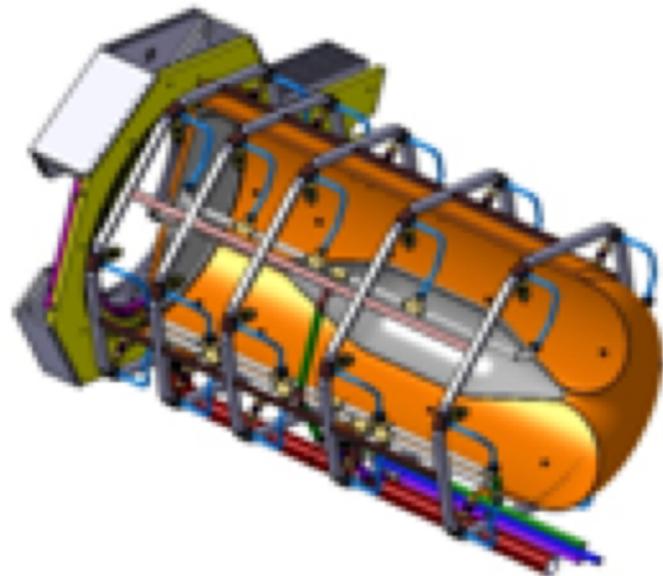
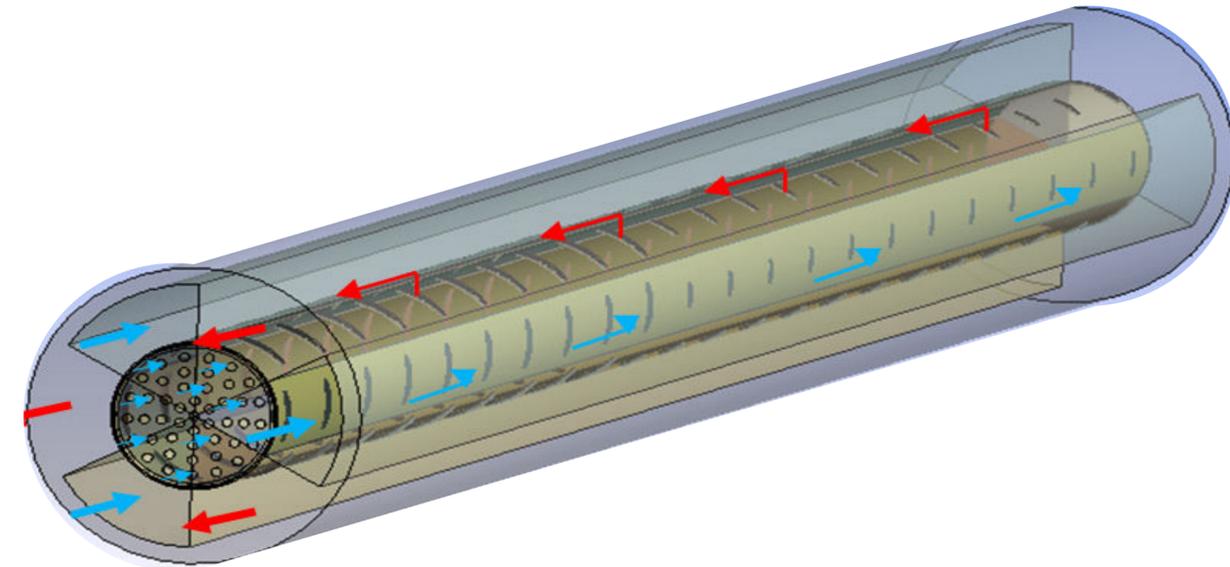


Horn parametrization based on Genetic Algorithm

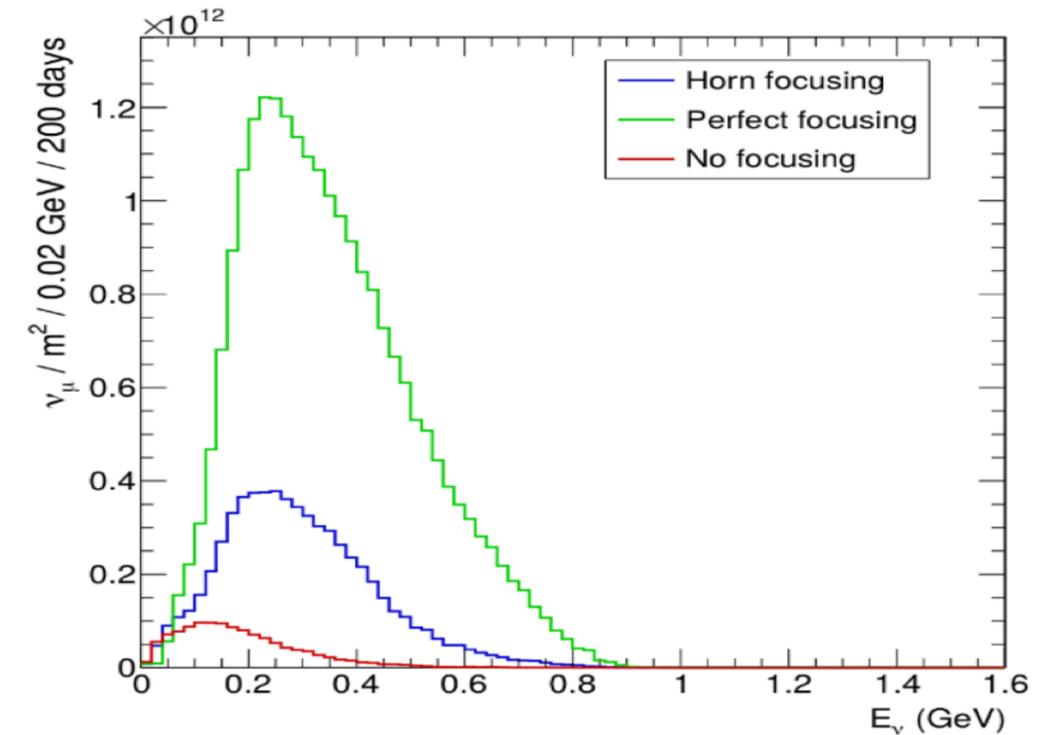

Eric Baussan; and Packed-bed target, studied by RAL within the EUROnu project", Phys. Rev. ST Accel. Beams 17,031001 - arXiv: 1212.0732

ESSNUSB NEUTRINO FLUX

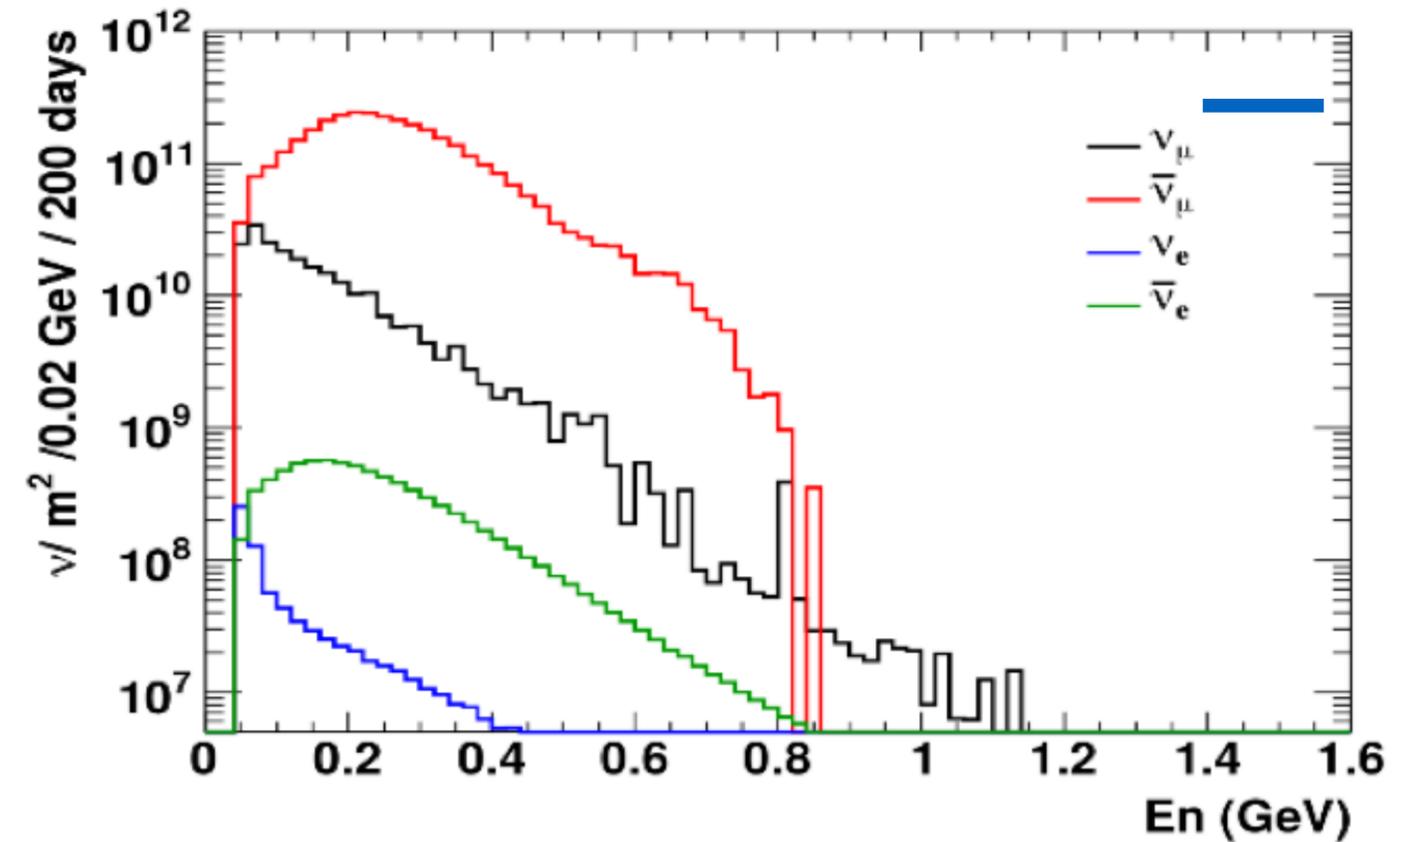
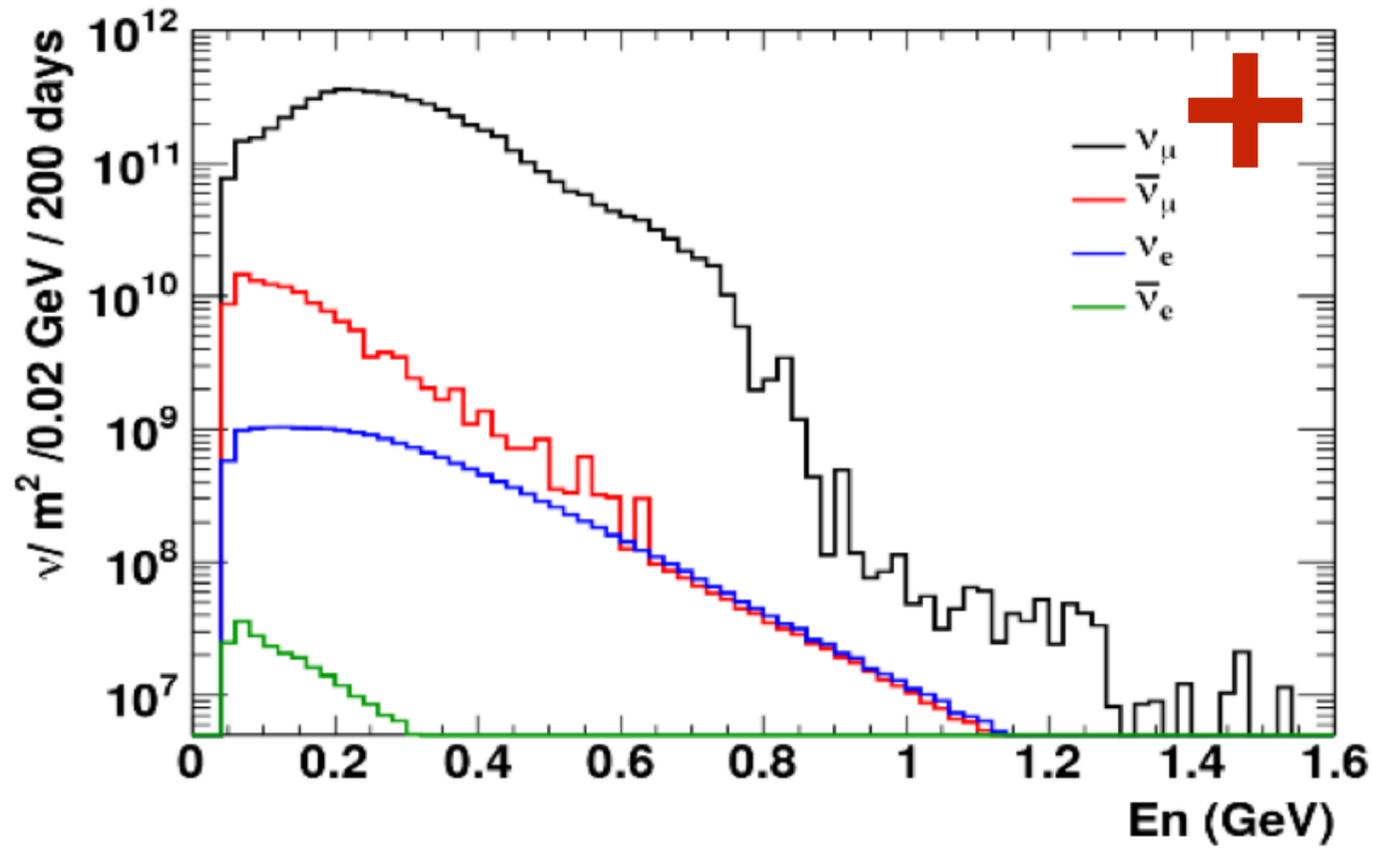


	Positive Polarity		Negative Polarity	
	N (1E10 1/m²)	%	N (1E10 1/m²)	%
Muon neutrino	583	98	23.9	6.55
Muon anti neutrino	12.8	2.1	340	93.2
Electron neutrino	1.93	0.3	0.08	0.02
Electron anti neutrino	0.03	0.01	0.78	0.21

Eric Baussan

DETECTORS

- 1 Megaton of ultra pure water as the far detector (400 olympic size swimming pools)
 - That is 20 times the volume of the super-Kamiokande
- 1000 meter deep underground (1232 m)
 - To decrease the noise and background from cosmic radiation

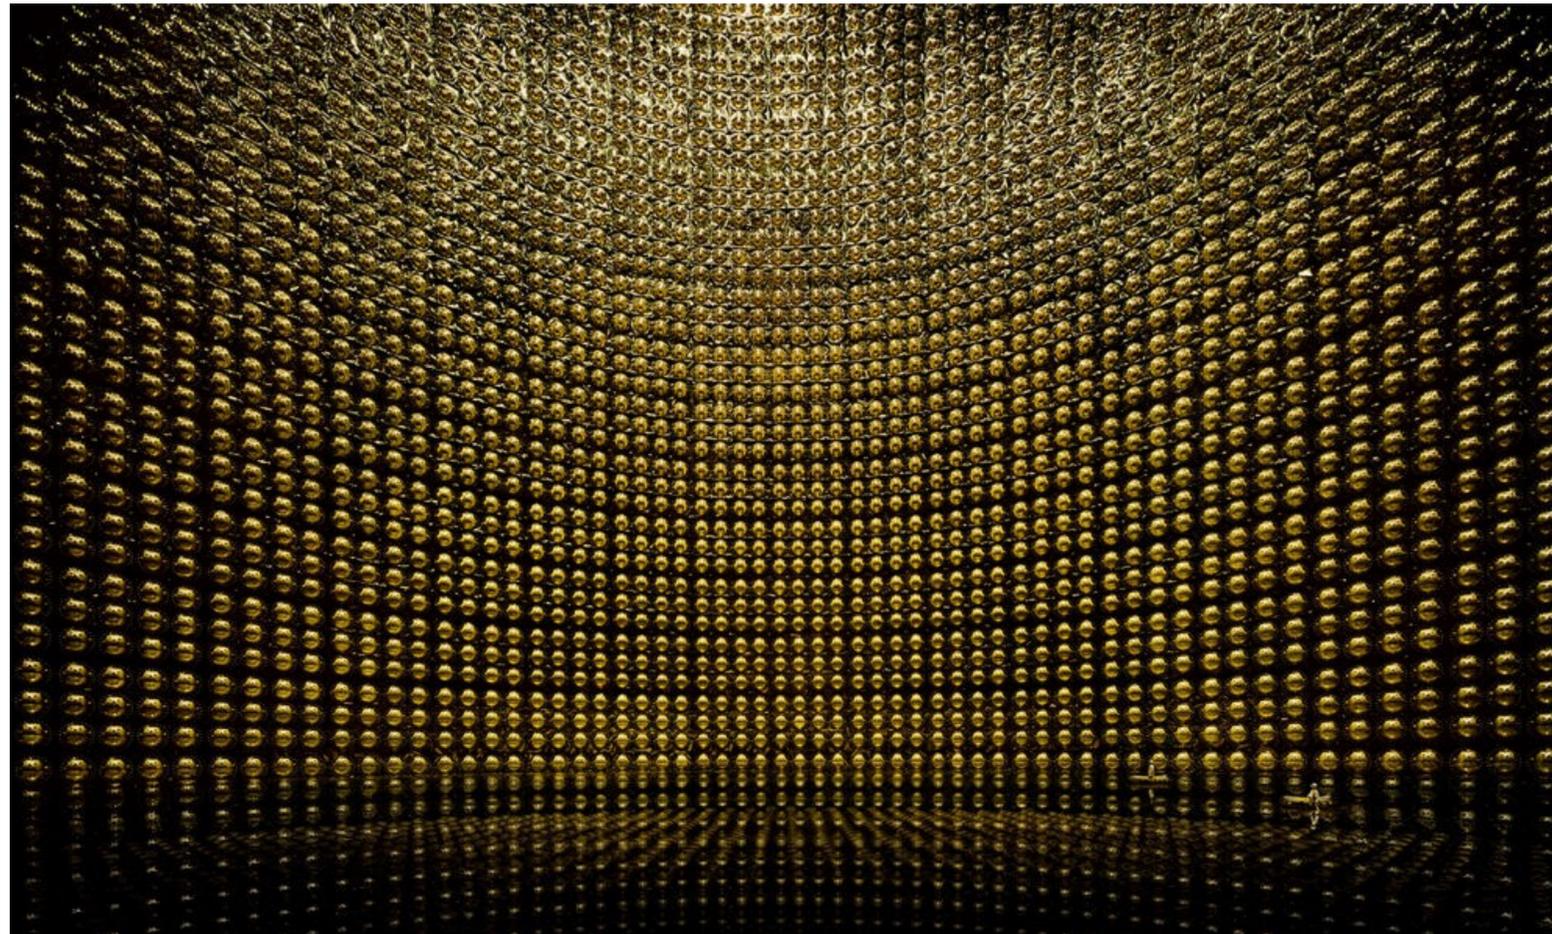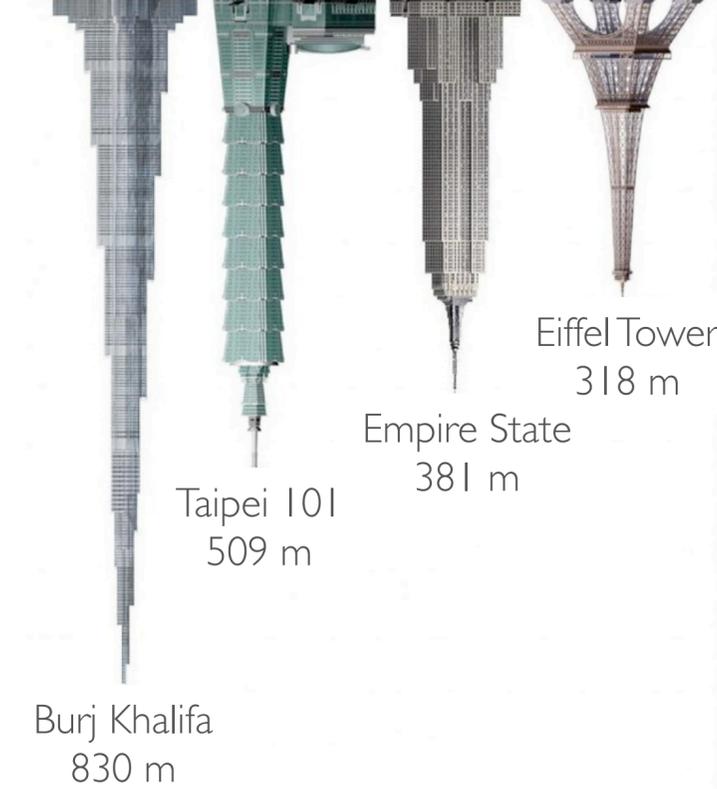

Super-Kamiokande Detector



- **The ESS project** has seen good progress, with RFQ beam commissioning planned for early summer
- **ESSnuSB** received funding to study the feasibility of ESS linac upgrade from 5 MW to 10 MW to deliver 1E23 p.o.t/yr for neutrino oscillation studies
- **Linac upgrade**
 - The ESS linac lattice is capable of accelerating and transporting the H- beam with minimal stripping losses, such that the total losses of p and H- remain within 1 W/m
 - H- loss phenomena have been studied, and the transfer line to ring designed to respect the loss limits
 - The ESS's stacked multi-layer modulator has the capability to be upgraded for the ESSnuSB
- **Accumulator**
 - A ring with 4 fold symmetry, collimation and RF section is designed to accumulate the high charge beam
 - Different injection paintings have been studied to manage the stripper foil heating and uniform charge distribution and a fast extraction system has been designed
- **Target**
 - A target capable of receiving 4 x 1.6 MW, 2.5 GeV proton beam and a dedicated horn is designed
 - The power supply is designed to deliver high current short pulses (350 kA x 16 x 14 Hz)
- Near and far detectors, cavern, civil engineering, and infrastructure were not covered in this talk



THANK YOU!

Acknowledgments:

Most of the content is provided by my colleagues within the ESSnuSB collaboration, only some of the names are mentioned in the slides.

ESSnuSB has received funding from the European Union's Horizon 2020 research and innovation programme under grant agreement No 777419

ESSNUSB LOOKING FOR THE ANSWER



<https://www.youtube.com/watch?v=PwzNzLQh-Dw>

<https://www.youtube.com/watch?v=qAnvft0nAlg>